
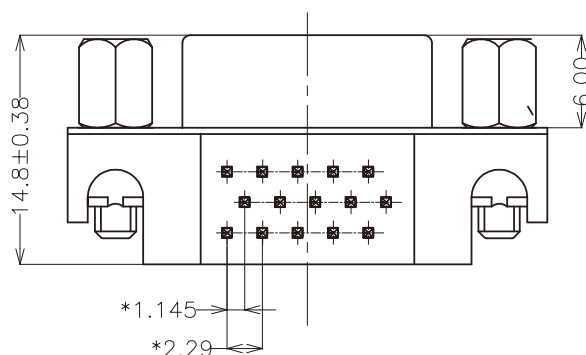
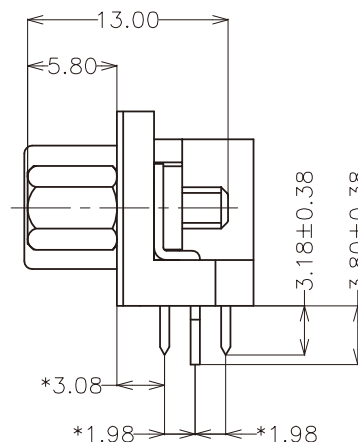


P.C.B. LAYOUT

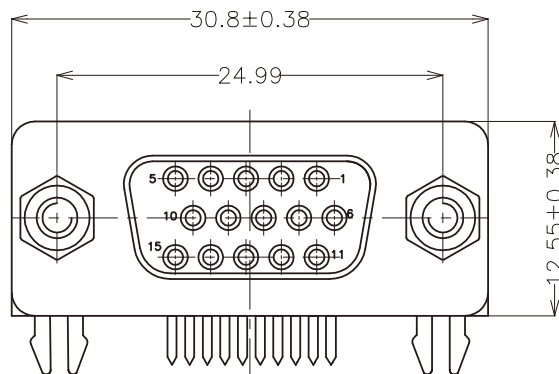

NOTES:

1.MATERIAL:

1.1 Insulator:PBT+30%Glass Fiber (UL94V-O)

1.2 Contact: Brass

1.3 Contact Plated: Gold and Tin Plated

1.4 Shell: Steel, Nickle Plated

2.SPECIFICATION:

2.1 Current Rate: 5 Amps

2.2 Insulator Resistance: 1000MΩ Min. at 500V DC

2.3 Dielectric Strength: 500V Per minute

2.4 Operation Temperature: -55°C to+105°C

"*"標示是重點管控尺寸

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.38
.XX ± 0.25
.XXX ± 0.15
ANG ± 2°

PPOJECTION

照片框

ORDER INFORMATION

HDR30-SSNJ6BL-15S9-LF

SERIES FEMALE SEMI GOLD JACKSCREW 5.8mm NUT
LEADFREE
EMPTY#9
15WAY
BLUE

DESCRIPTION: HDR 15母3.08叉鉗鎖半金藍 3.18 縮9 661C 鎖螺絲5.8*13.0 RoHS