


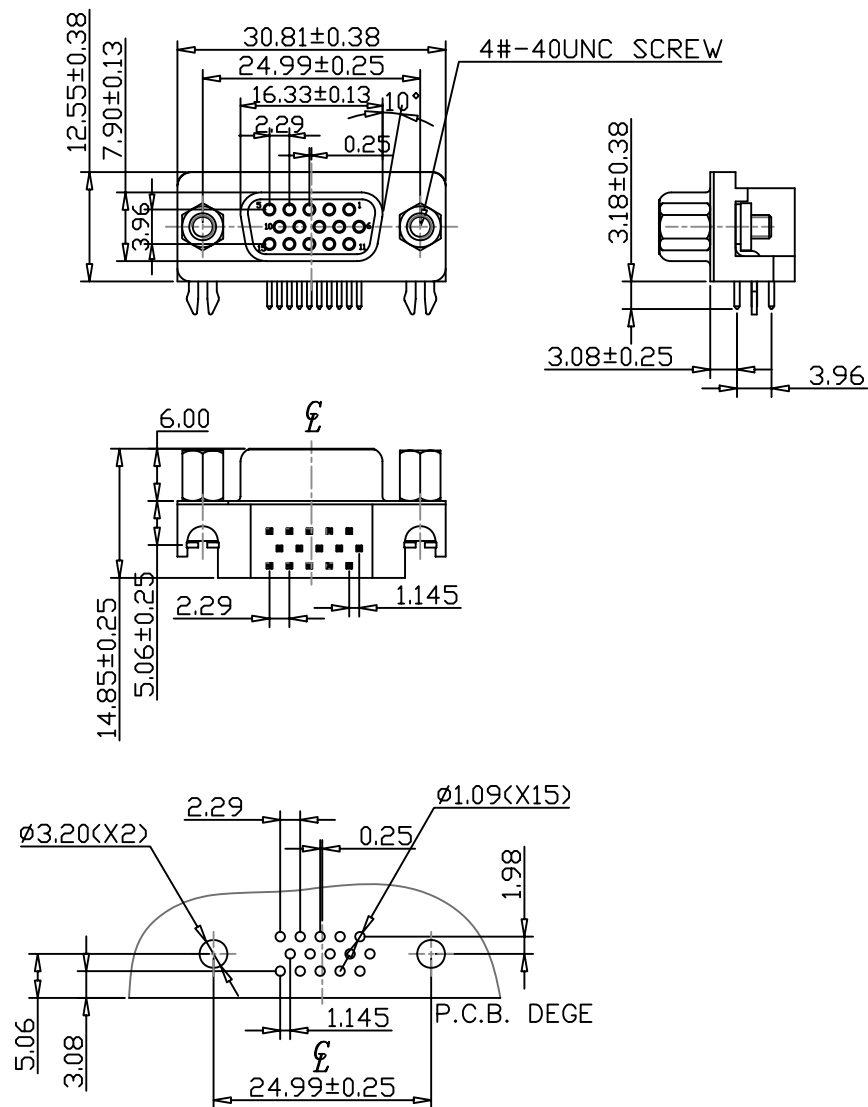

RECOMMENDED P. C. B. LAYOUT

SPECIFICATIONS

ELECTRICAL CHARACTERISTICS:

Contact Current Rating:3 Amperes.
Dielectric Withstanding Voltage: AC 1000/60sec.r.m.s.
Insulation Resistance:5000 Medohms Minimum.at DC 500V.
Contact Resistaance:25 Milliohms Maximum.
Operating Temperature:-55°C to+105°C.

MECHANICAL CHARACTERISTICS:

Contact Insertion Force:341 g.Maximum.
Contact Seperation Force:21 g.Minimum.

MATERIALS:

Contacts:Brass.
Insulator: PBT UL 94V-0 Rated.
Shell:Cold Roller Steel.

FINISHES:

Contact:Gold Flash.
Shell:Nickel Plated.

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

X.±

CHECKED BY GENIUS

.X±

UNIT / mm

SCALE 1 : 1

.XX±


DATE

.XXX±

ANG ±

SIZE A4

PPOJECTION



ORDER INFORMATION

HDR30-SSNJBL-15-LF

SERIES | LEADFREE
FEMALE | 15WAY
NUT | BLUE
SEMI GOLD | JACKSCRW

DESCRIPTION: MINI BODY D-SUB CONNECTOR 0.121"(3.08mm)
FOOTPRINT,RIGHT ANGLE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com