


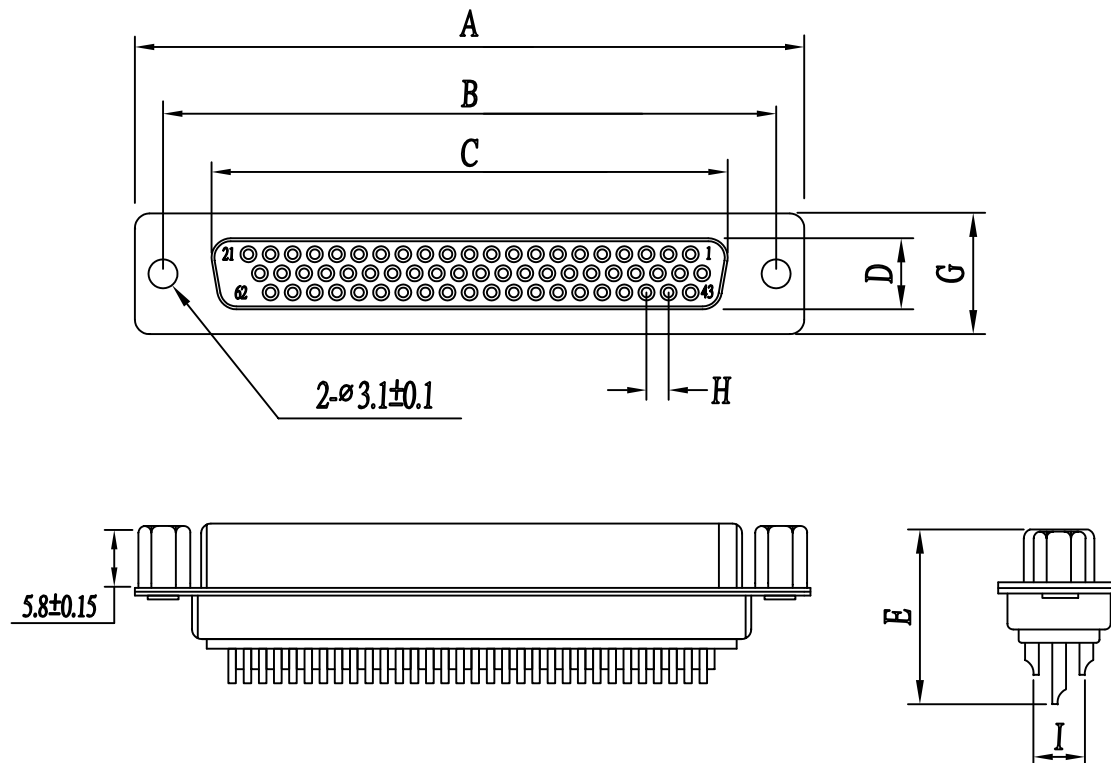

Note:

1.Material:

- 1.1 Insulator: High temperature thermoplastic with g.f,UL94v-0
- 1.2 Contact: Copper alloy,t=0.20mm
- 1.3 Shell: Spcc,t=0.30mm

2.Specification:

- 2.1 Current rating: 1 A Max.
- 2.2 Dielectric withstanding voltage: 750 V(ac) for 1 min.
- 2.3 Contact resistance: 30 mW Max.
- 2.4 Insulation resistance: 1000 MW Min.
- 2.5 Total mating force: 8.0 Kgf Max.
- 2.6 Total unmating force: 1.5 Kgf Min.
- 2.7 Temperature range: -55 °C~85 °C

PART NO	A±0.25	B±0.20	C±0.20	D±0.20	E±0.30	F±0.25	G±0.25	H±0.05	I ±0.20
HDS-SxJ-15	30.81	24.99	16.33	8.0	16.5		12.55	2.29	3.96
HDS-SxJ-26	39.25	33.32	24.66	8.0	16.5		12.55	2.29	3.96
HDS-SxJ-44	53.04	47.04	38.38	8.0	16.5		12.55	2.29	3.96
HDS-SxJ-62	69.50	63.50	54.84	8.0	16.5		12.55	2.41	3.96

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

HDS-SxJ-xx-LF
SERIES T LEADFREE
15~62WAY
JACKSCREW
S:SEMI GOLD
G:FULL GOLD
FEMALE

DESCRIPTION: D-SUB HDD SOLDER (F) 前鉗型(不通孔)