
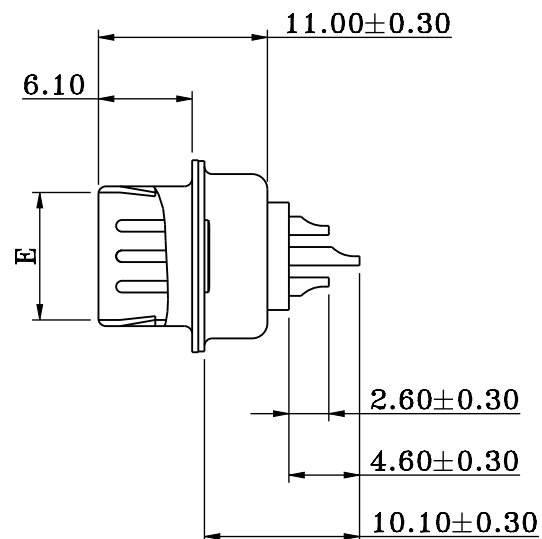


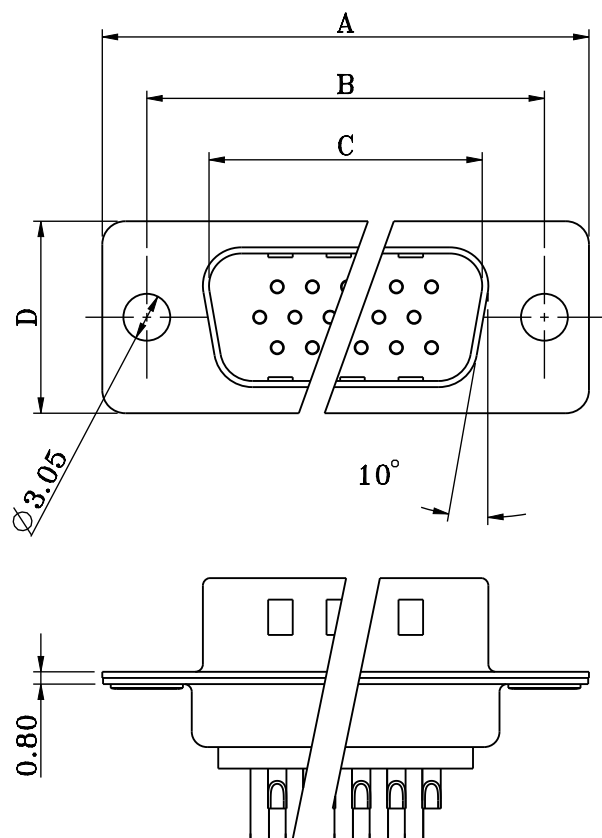

MATERIALS AND FINISH

SHELL: STEEL MATERIAL, FRONT SHELL NICKEL FINISHED
BACK SHELL NICKEL FINISHED
DIMPLES ON PLUG ONLY

INSULATOR: PBT THERMOPLASTIC, 30% GLASS FILLED,
UL 94V-0 RATED, WHITE COLOR

CONTACT: PRECISION MACHINED COPPER ALLOY
GOLD PLATED

ELECTRICAL CHARACTERISTICS

CONTACT CURRENT RATING : 3.0 A
CONTACT RESISTANCE : 10 mΩ MAX.
DIELECTRIC WITHSTANDING VOLTAGE : 1000 V AC MIN.
INSULATION RESISTANCE : 5GΩ MIN.
TEMPERATURE RATING : -55°C ~ +125°C

A	B	C	D	E	PART NO.
30.80	25.00	16.90	12.50	8.3	HDSL-PG15-15
39.20	33.30	25.25	12.50	8.3	HDSL-PG15-26
53.05	47.05	38.95	12.50	8.3	HDSL-PG15-44
69.40	63.50	55.40	12.50	8.3	HDSL-PG15-62

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ± 0.40
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ± 5°

照片框

ORDER INFORMATION

HDSL-PG15-xx-LF

SERIES | LEADFREE
15-62 WAY
GOLD 15u"
MALE

DESCRIPTION: