
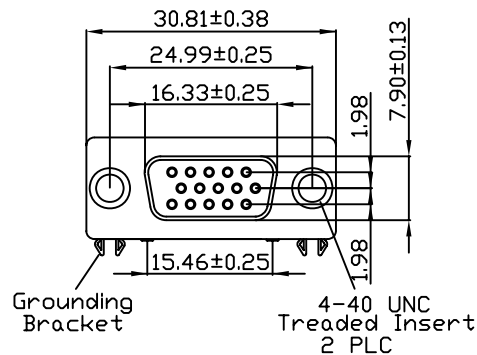
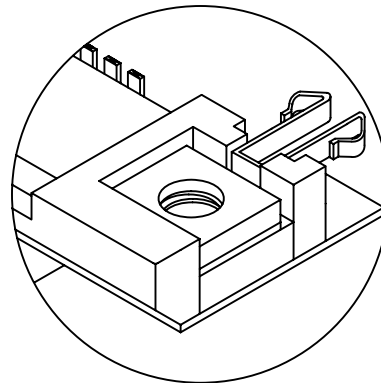
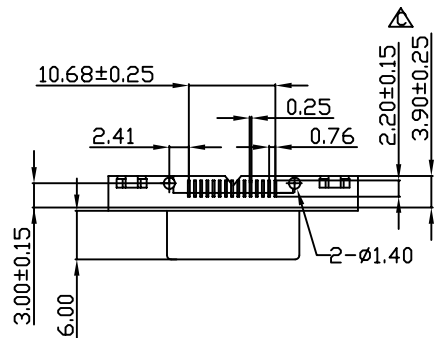


Pin Number :  
6 11 1 7 12 2 8 13 3 9 14 4 10 15 5  
Recommended PCB Layout

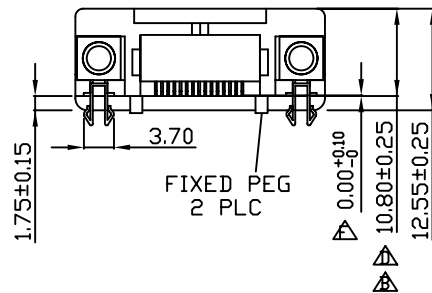

Fork Board Lock Type  $\Delta$

$\Delta$  Shell -Steel zinc plated or  
tin plated or nickel plated.  
Bracket-Brass strip-H nickel plated  
Screw-Brass nickel plated  
Pc 99 colorful insulator-  
Pantone#661C-High Density  
15 pos,Female  
Contact Material-  
Socket-Phosphor bronze

Duplex plated as follows:  
A-.000030[.00076]gold on mating end,  
tin-lead on termination end,  
with entire contact nickel  
B-.000015[.00038]gold on mating end,  
tin-lead on termination end,  
with entire contact nickel  
C-Gold flash on mating end,  
tin-lead on termination end,  
with entire contact nickel

Specifications  
Rated current  
5A  
Rated Voltage  
300V DC  
Withstanding Voltage  
500V(r.m.s) AC for 1 minute  
Insulation Resistance  
more than 1000M ohm at 500V DC  
Contact Resistance  
13m ohm Max  
Dielectric Strength  
1000V AC Min for 1 minute  
Temperature  
-55 °C~+105 °C

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±  
.X ± 0.25  
.XX ± 0.15  
.XXX ± 0.08  
ANG ±

PPOJECTION  $\Phi$

照片框

ORDER INFORMATION

HDW-SNZ2BL-15-LF

SERIES

LEADFREE

15 WAY

BLUE

CLIP

NUT

FEMALE

DESCRIPTION: D SUB RIGHT ANGLE SURFACE-MOUNT CONNECTORS  
DSMTI-SERIES LOW PROFILE 15 POST FEMALE