


PIN OUT:

P1		P2		
1	White	1		
2	White/Black	2		
3	Red	3		
4	Red/Black	4		
5	Yellow	5		
6	Yellow/Black	6		
7	Green	7		
8	Brown	8		
9	Brown/Black	9		
10	Green/Black	10		
14		Pink	1	
15		White	2	
16	Orange	11		
17	Orange/Black	12		
18	Gray	13		
19	Violet	14		
20	Violet/Black	15		
21	Gray/Black	16		
22	UL1007 Black			
Shell		Braid	5	
41		Red	1	
42		White	2	
43		Green	3	
44		Black	4	

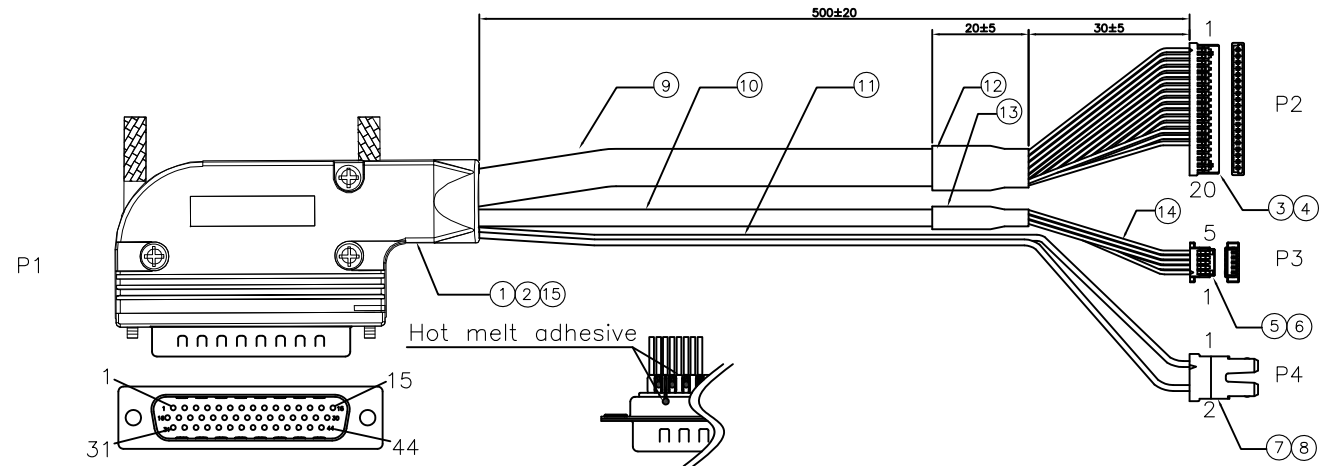

ITEM	DESCRIPTION	Q'TY
1	D-SUB 44P High Density Solder Male Type	1
2	D-SUB 44P 90° Assembly metal shell	1
3	1.25mm Wire To Board Housing 20WAYS DF14-H-20	1
4	1.25mm Wire To Board Terminal	16
5	1.0mm Wire To Board Housing 5WAYS SH-H-05	1
6	1.0mm Wire To Board Terminal	5
7	3.5mm Wire To Board Housing 2WAYS BHS-S-02	1
8	3.5mm Wire To Board Terminal	2
9	UL20276 30AWG*8P+AB PVC Jacket Color:black OD:7.5mm	1
10	USB CABLE UL2725 28AWG*2C+28AWG*1P+AB Jacket OD:3.5mm	1
11	UL3239 24AWG Color:XX	2
12	ø8.0 Heat Shrink Tube Color:Black L:20mm	1
13	ø4.0 Heat Shrink Tube Color:Black L:20mm	1
14	ø1.0 Heat Shrink Tube Color:Black L:40mm/20mm	1
15	UL1007 28AWG Color:Black	1

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.50
.XX ± 0.30
.XXX ±
ANG ±

照片框

ORDER INFORMATION

HDX13-44RL002830-E50C-LF

SERIES

44 PIN

LONG RAIL

28.30 AWG

500mm

LEADFREE

MALE TO FEMALE

90°

DESCRIPTION: D-SUB 44P CABLE