




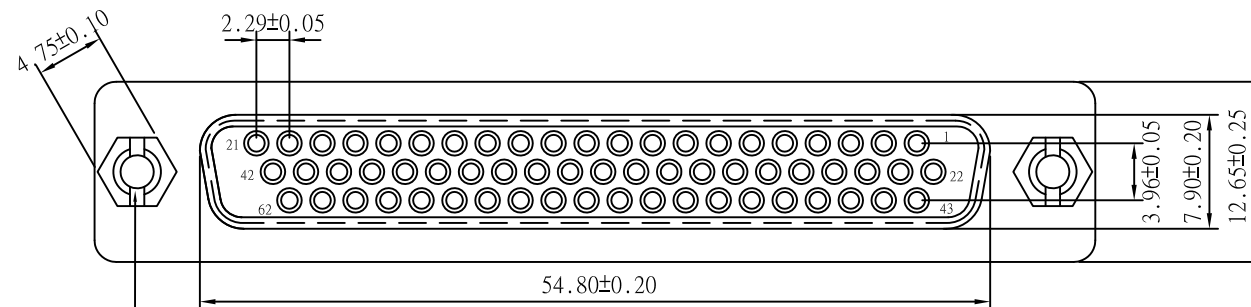


UNC #4-40X3.3mm
(THREAD)

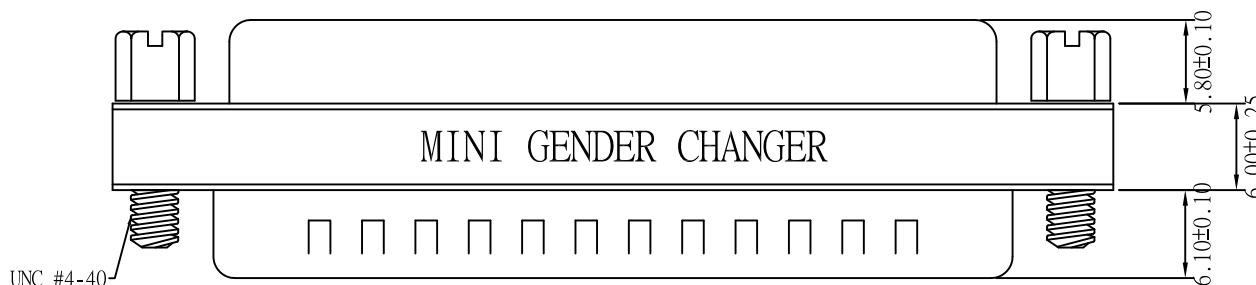

UNC #4-40

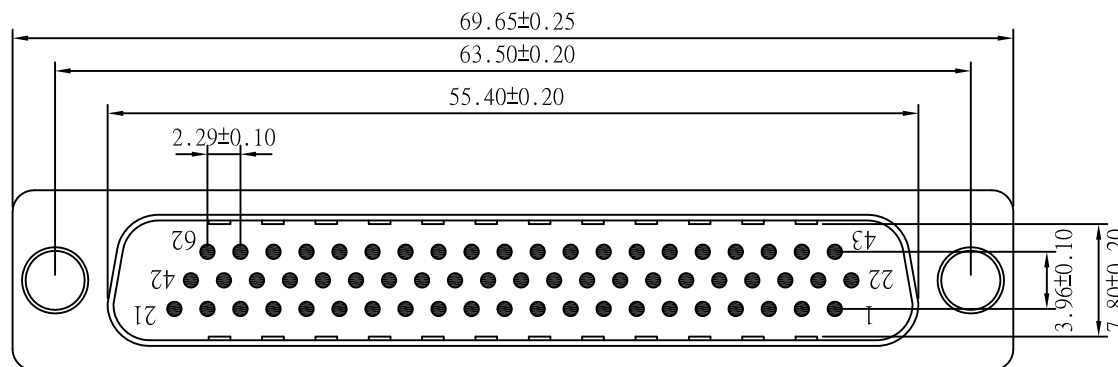

UNC #4-40 Hexscrew



HGC 62 M/F GENDER CHANGER

PIN OUT: 62Male

62Female

1	-----	1
2	-----	2
61	-----	61
62	-----	62
G	-----	G

ELECTRICAL TEST:

1. 100% Test (Open, short, miss wire)
2. Contact Resistance: 5 ohm max.
3. Insulation Resistance: 5M ohm min.
4. Hi-pot: 200V DC/0.5mA

Label: yellow color with black character

One side: MINI GENDER CHANGER

The other side: U.S.A. PATENT 5199906 GENDER CHANGER

SPECIFICATION

INSULATOR: PBT Glass fibre reinforced

UL 94 VO(Blue)

CONTACT: Brass

CONTACT PLATING: Gold plated over nickel

SHELL: Tin Plated Shell

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.20
.XX ± 0.15
.XXX ± 0.05
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

HDX2-ES-6262-LF

SERIES

LEADFREE

62 MALE / 62 FEMALE

SLIM

MALE TO FEMALE

DESCRIPTION: