


Specifications:  
 Current Rating:3.0A AC,DC  
 Voltage Rating:250V AC,DC  
 Contact Resistance:20mohm Max  
 Insulation Resistance:1000Mohm Min.  
 Withstanding Voltage:1000V AC/minute  
 Operating Temperature Range:-40°C~+105°C  
 Material and Finish:  
 Insulator:Nylon 66 (UL94V-0)  
 Insulator Color:Black  
 Contact:Brass  
 Plating:Gold Plated

Dimension:

Circuits	Dimension:		Circuits	Dimension:	
	A	B		A	B
02	2.54	5.08	12	27.94	30.48
03	5.08	7.62	13	30.48	33.02
04	7.62	10.16	14	33.02	35.56
05	10.16	12.70	15	35.56	38.10
06	12.70	15.24	16	38.10	40.64
07	15.24	17.78	17	40.64	43.18
08	17.78	20.32	18	43.18	45.72
09	20.32	22.86	19	45.72	48.26
10	22.86	25.40	20	48.26	50.80
11	25.40	27.94			

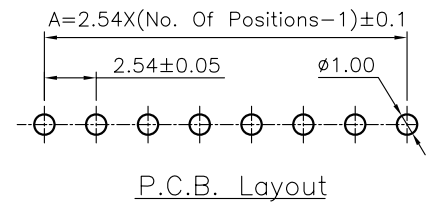

HE14-DGTL-1XxxA-LF  
 LEADFREE  
 RoHS Compliant

**MORETHANALL**  
 CONNECTORS  
 ASSEMBLIES  
 焯倫股份有限公司

PART NO. HE14-DGTL-1XxxA		CHECKED BY CY	TOLERANCES ARE .X ± 0.2 .XX ± 0.15 .XXX ± ANG	DESCRIP TION: Board Wafer Single Row Straight Type		
DWG NO. HE14-DGTL-1XxxA						
FILE NO.		DRAWING BY	AREA	REVISIONS	HK	DATE
UNIT / mm	SCALE 1:1	PROJECTION				