
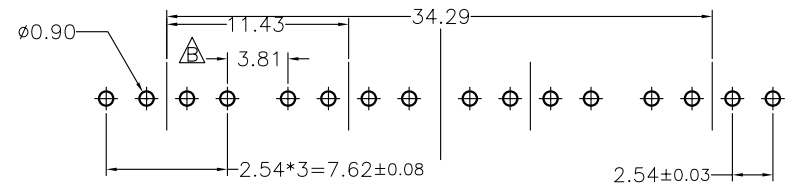




Specifications:

Current Rating:3.0A AC/DC  
 Voltage Rating:250V AC/DC  
 Contact Resistance:20m ohm. Max.  
 Insulation Resistance:1000M ohm. Min.  
 Withstanding Voltage:1000V AC For One Minute  
 Operating Temperature Range:-25°C ~ +105°C  
 Material and Finish  
 Insulator:Nylon66 (UL94V-0)  
 Insulator Color:Black  
 Contact:Brass  
 Plated:Tin Plated

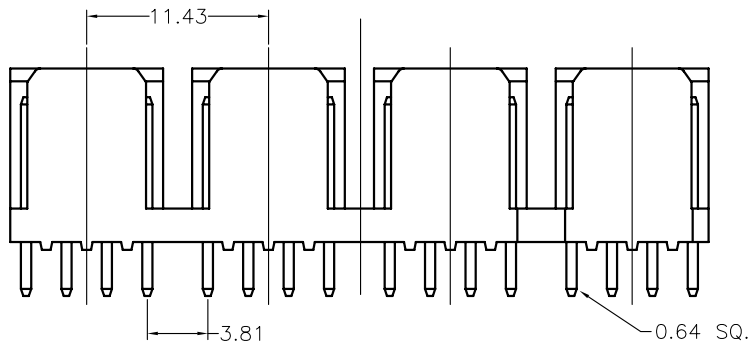

PCB Layout

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PJECTION

X. ±  
 .X ± 0.20  
 .XX ± 0.15  
 .XXX ±  
 ANG ±



ORDER INFORMATION

HE14-DGTL-4401A-LF  
 SERIES | LEADFREE  
 | TRI LOCK  
 | GOLD  
 | DIP 180°  
 | 4/4 BACKREST SINGLE ROW A TYPE

DESCRIPTION: 2.54mm Wire to Board Wafer Single Row

煜倫股份有限公司

www.morethanall.com