

Specifications:


Current Rating:3.0A AC/DC
 Voltage Rating:250V AC/DC
 Contact Resistance:20m ohm. Max.
 Insulation Resistance:1000M ohm. Min.
 Withstanding Voltage:1000V AC For One Minute
 Operating Temperature Range:-40°C ~ +105°C
 Material and Finish
 Insulator:Nylon 66 (UL94V-0)
 Insulator Color:Black
 Contact:Brass
 Plated:Tin Plated

HE14-DGTL-4x01-LF
 LEADFREE

RoHS Compliant

Dimension:

Part NO.:	Port	Dimension:	
		A	B
HE14-DGTL-4201	02	11.43	21.03
HE14-DGTL-4301	03	22.86	32.46
HE14-DGTL-4401	04	34.29	43.89

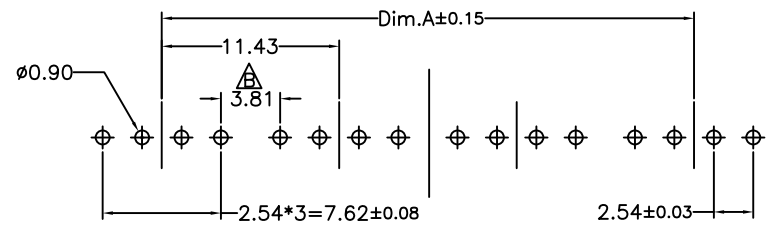

PCB LAYOUT



PART NO. HE14-DGTL-4x01

DWG NO. HE14-DGTL-4x01

CHECKED BY CY

TOLERANCES ARE

DESCRIP TION: 2.54mm Wire to Board Wafer Single Row

FILE NO.

DRAWING BY

.X ± 0.2
.XX ± 0.1
.XXX ±
AWG

AREA	REVISIONS	HK	DATE

煜倫股份有限公司

UNIT / mm SCALE 1:1

PROJECTION