


Specifications:
 Current Rating: 3.0A AC, DC
 Voltage Rating: 250V AC, DC
 Contact Resistance: 20m Ohm Max
 Insulation Resistance: 1000M Ohm Min.
 Withstanding Voltage: 1000V AC/Minute
 Operating Temperature Range: -40°C To +85°C
 Material and Finish:
 Insulator: Nylon 66 (UL94V-0)
 Insulator Color: Black
 Contact: Brass
 Plating: Gold Plated 30u"

Dimension:

| Circuits | Dimension: | | Circuits | Dimension: | |
|----------|------------|-------|----------|------------|-------|
| | A | B | | A | B |
| 04 | 2.54 | 5.08 | 24 | 27.94 | 30.48 |
| 06 | 5.08 | 7.62 | 26 | 30.48 | 33.02 |
| 08 | 7.62 | 10.16 | 28 | 33.02 | 35.56 |
| 10 | 10.16 | 12.70 | 30 | 35.56 | 38.10 |
| 12 | 12.70 | 15.24 | 32 | 38.10 | 40.64 |
| 14 | 15.24 | 17.78 | 34 | 40.64 | 43.18 |
| 16 | 17.78 | 20.32 | 36 | 43.18 | 45.72 |
| 18 | 20.32 | 22.86 | 38 | 45.72 | 48.26 |
| 20 | 22.86 | 25.40 | 40 | 48.26 | 50.80 |
| 22 | 25.40 | 27.94 | | | |

HE14-RS30-2Xxx-LF
 LEADFREE
 S30:SEMI/GOLD 30u
 RoHS Compliant

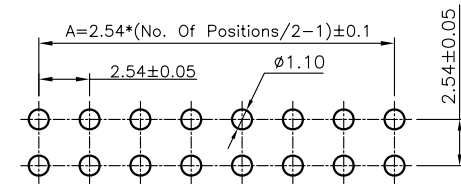

P.C.B. Layout



煜倫股份有限公司

| | | | | | | | |
|-------------------------|-----------|---------------|--|-------------------------------------|--|---|--|
| PART NO. HE14-RS30-2Xxx | | CHECKED BY CY | | TOLERANCES ARE | | DESCRIP TION: 2.54mm Wire to Board Wafer Double Row | |
| DWG NO. HE14-RS30-2Xxx | | DRAWING BY | | .X ± 0.2 .XX ± 0.1 .XXX ± .01 | | AREA | |
| FILE NO. | | PROJECTION | | AWG | | REVISIONS | |
| UNIT / mm | SCALE 1:1 | | | | | HK | |
| | | | | | | DATE | |