

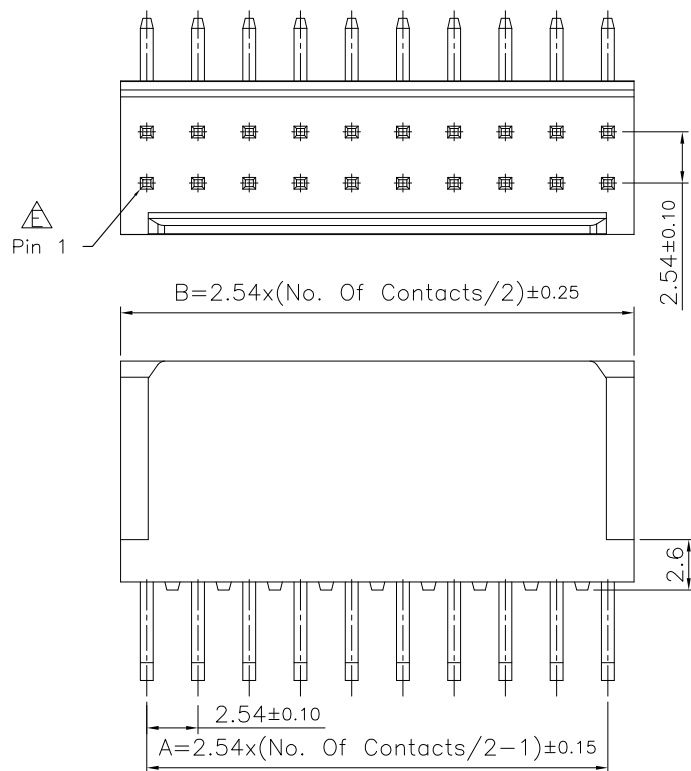


P.C.B. Layout

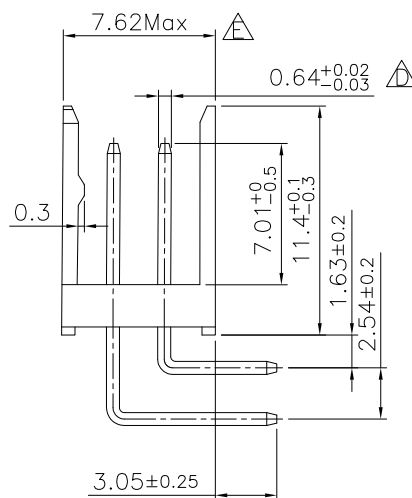

Specifications:
 Current Rating:3.0A AC,DC
 Voltage Rating:250V AC,DC
 Contact Resistance:20mohm Max
 Insulation Resistance:1000Mohm Min.
 Withstanding Voltage:1000V AC/minute
 Operating Temperature Range:-40°C~+85°C

Material And Finish:
 Insulator:High Temp Plastic (Nylon 66 UL94V-0)
 Insulator Color:Black
 Contact:Brass
 Plating:Tin Plated



Dimension:

Circuits	Dimension:		Circuits	Dimension:	
	A	B		A	B
04	2.54	5.08	24	27.94	30.48
06	5.08	7.62	26	30.48	33.02
08	7.62	10.16	28	33.02	35.56
10	10.16	12.70	30	35.56	38.10
12	12.70	15.24	32	38.10	40.64
14	15.24	17.78	34	40.64	43.18
16	17.78	20.32	36	43.18	45.72
18	20.32	22.86	38	45.72	48.26
20	22.86	25.40	40	48.26	50.80
22	25.40	27.94			

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1


DATE

SIZE A4

TOLERANCES ARE

X, ±
 .X ± 0.20
 .XX ± 0.15
 .XXX ±
 ANG ±

PPOJECTION



ORDER INFORMATION

HE14-RT-2Xxx-LF

SERIES

LEADFREE

2X02:04WAY

2X20:40WAY

TIN PLATED

DIP 90°

DESCRIPTION: 2.54mm Wire to Board Wafer Double Row