



P. C. B Hole Layout

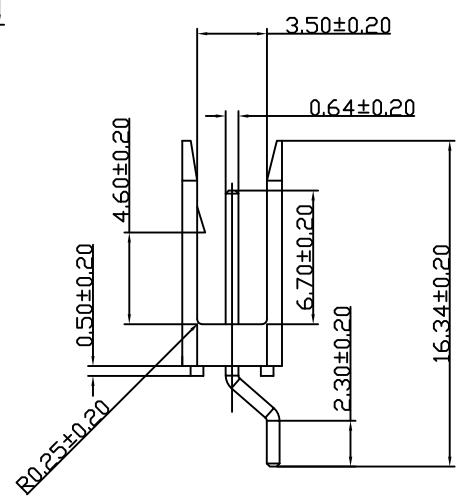

SPECIFICATION

Current Rating : 3Amp  
 Insulator Resistance : 5000 Megohms Min.  
 Contact Resistance : 20 Milliohms Max.  
 Dielectric Withstanding: AC 1000 V  
 Operating Temperature : -40°C ~ +105°C  
 Max Processing Temp : 230°C For 30 ~ 60 Seconds  
 (260°C For 10 Seconds)  
 Contact Material : Brass  
 Insulator Material : Polyester, UL 94V-0  
 Standard: NY-9T  
 Contact Plated : Full Gold, Full Tin,  
 Selective Plated

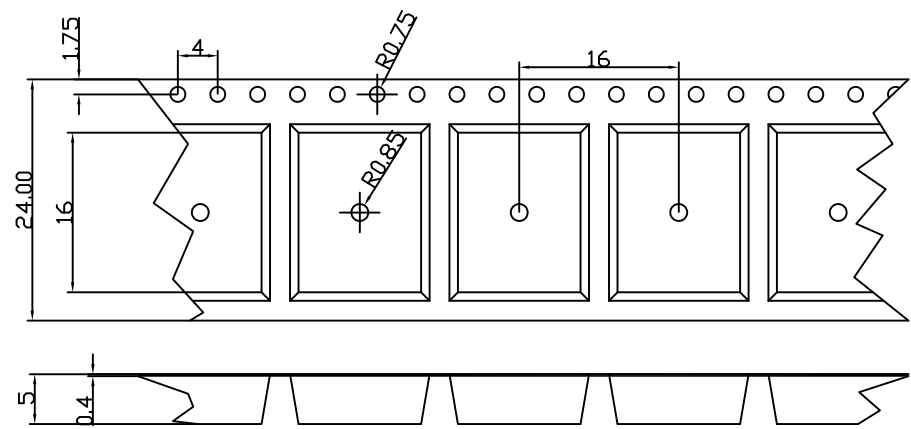

PACKING  
 CARTON SIZE 340\*340\*290mm  
 750PCS PER REEL 330\*30mm  
 10REELS/CARTON

HE14-WX9TRDP-1X04-LF  
 LEADFREE

RoHS Compliant



煜倫股份有限公司

PART NO. HE14-WX9TRDP-1X04		CHECKED BY CY	TOLERANCES ARE .X ± 0.2 .XX ± .XXX ± AWG	DESCRIPTION:			
DWG NO. HE14-WX9TRDP-1X04							
FILE NO.		DRAWING BY	AREA REVISIONS HK DATE				
UNIT / mm	SCALE 1:1	PROJECTION					