


SPECIFICATION

Current Rating : 3Amp
 Insulator Resistance : 5000 Megohms Min.
 Contact Resistance : 20 Milliohms Max.
 Dielectric Withstanding: AC 1000 V
 Operating Temperature : -40°C ~ +105°C
 Max Processing Temp : 230°C For 30 ~ 60 Seconds
 (260°C For 10 Seconds)
 Contact Material : Brass
 Insulator Material : Polyester, UL 94V-0
 Standard: Nylon-6T
 Contact Plated : Full Gold, Full Tin,
 Selective Plated
 REEL PACK : 800 PCS PEK REEL

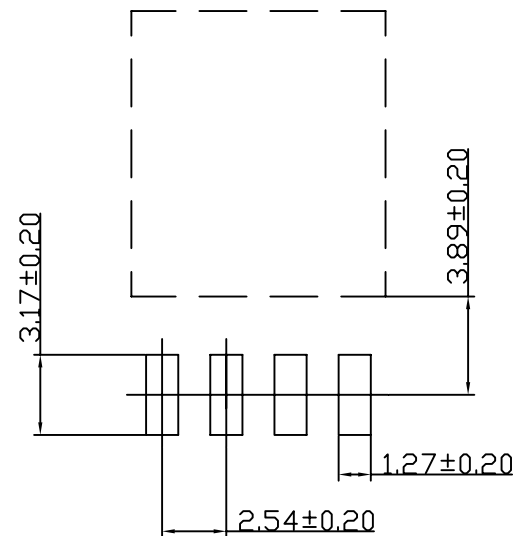

P. C. B Hole Layout

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT/ mm

SCALE 1:1

DATE

SIZE A4

X, ±
 .X ± 0.20
 .XX ± 0.15
 .XXX ±
 ANG ±

P PROJECTION

照片框

ORDER INFORMATION

HE14-WXTL-1X04-LF
 SERIES | TRI LOCK | 04 WAY | LEADFREE
 NON POST
 90°SMT

DESCRIPTION: 2.54mm Wire to Board Wafer Single Row SMD Type