

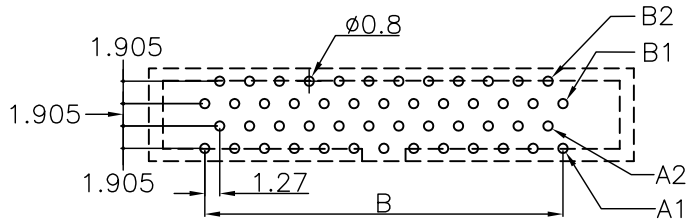



Material:
 Housing: 30% Glass filled PBT UL94V-0.
 Contacts: Phosphor Bronze.
Electrical Characteristics:
 Current Rating: 1 AMP.
 Insulator Resistance: 1000MΩ min. at DC 500V.
 Contact Resistance: 20mΩ max. at DC 100mA.
 Operating Temperature: -55°C ~ +105°C .
***RoHS Compliant**

HF-D-xxx-LF
 LEADFREE
 RoHS Compliant

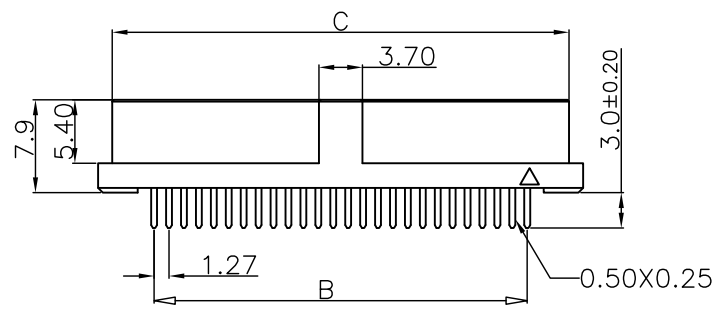

P.C. Board Layout Top View
 (Tolerance: ±0.05)
 (26,34,50 Position)

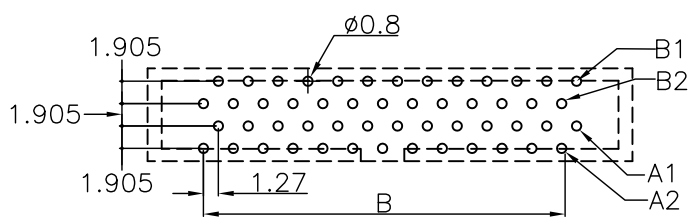

P.C. Board Layout Top View
 (Tolerance: ±0.05)
 (20,32,40,52,60,68,80,100 Position)

Dimension	20 Thru 100
Position	20 Thru 100
A	1.27xNo.of Positions/2+8.25
B	1.27xNo.of Positions/2-1.27
C	1.27xNo.of Positions/2+5.85

MORETHANALL
 CONNECTORS
 ASSEMBLIES

焯倫股份有限公司

PART NO. HF-D-xxx		CHECKED BY CY	TOLERANCES ARE .X ± 0.2 .XX ± .XXX ± AWG	DESCRIP TION:			
DWG NO. HF-D-xxx							
FILE NO.		PROJECTION	AREA	REVISIONS	HK	DATE	
UNIT / mm	SCALE 1:1						