



HF2X2-4040BS-F12N-LF
LEADFREE

RoHS Compliant

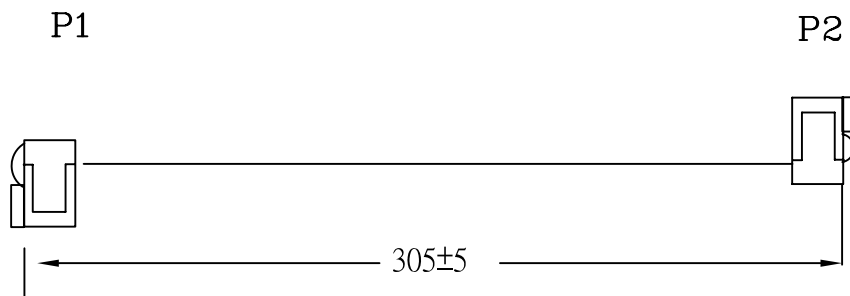

WIRING DIAGRAM

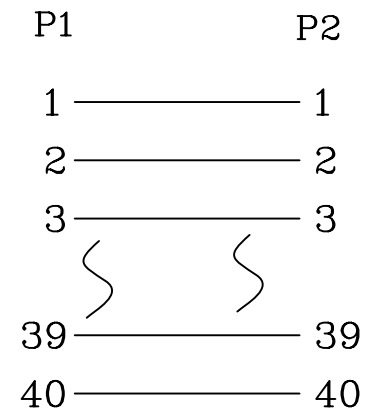

COMPONENTS	DESCRIPTION	Q'TY
1	P1 IDC SOCKET 40 POS (2.54mm X 1.27mm),W/CENTER	2
2	KEY & STRAIN RELIEF.	
3	P2 FLAT CABLE 40C (0.635mm PITCH) UL2678 AWG30	1
4	PVC, SOLID CONDUCTOR.	

MORETHANALL
CONNECTORS
ASSEMBLIES

煜倫股份有限公司

PART NO. HF2X2-4040BS-F12N

DWG NO. HF2X2-4040BS-F12N

FILE NO.


UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X ± 0.2
.XX ±
.XXX ±
AWG

DESCRIPTION: 1.27*2.54 40P TO 40P L:12"

AREA

REVISIONS

HK

DATE