

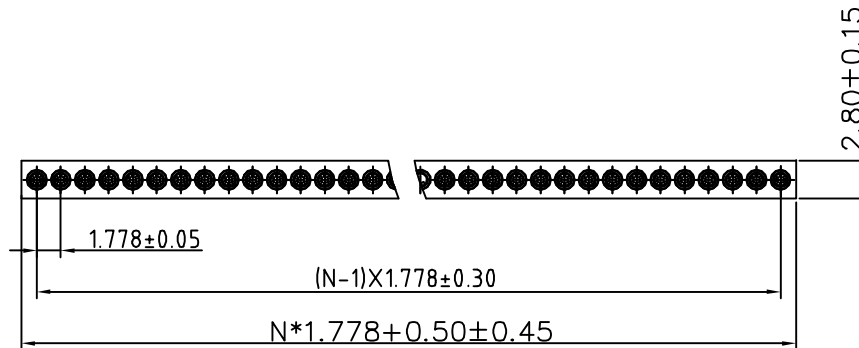


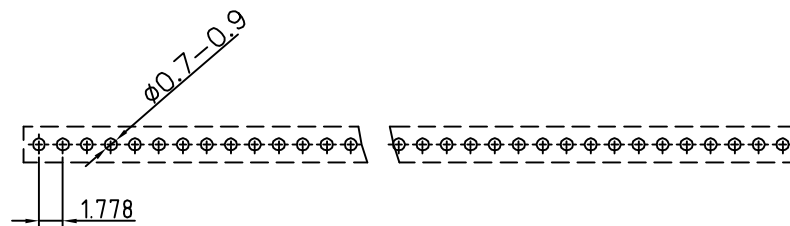

N=Number of contacts

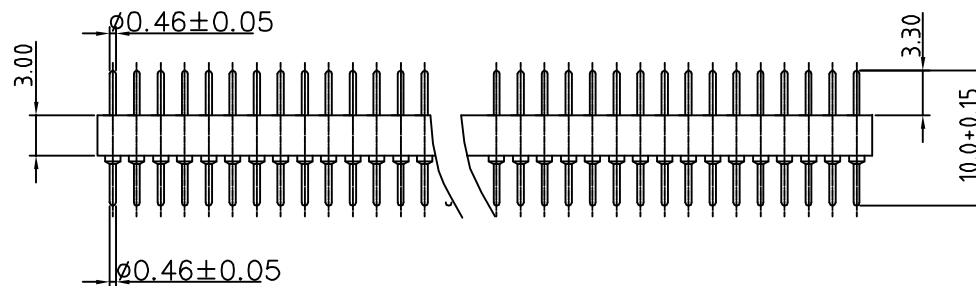

P.C.B LAYOUT

Technical Data

- ◆ Material:
 - Pin (outer sleeve) : Brass,machined, CuZn38Pb2
 - Plating : Tin plated : 2um/80u"nickel,5um/200u"Tin
 - Gold plated: 2um/80 u"nickel,full gold
- Insulator body(black) : Glass filled thermoplastic polyester
- UL94V-0
- ◆ Electrical
 - Current rating : 3 Amps/contact max.
 - Insulation resistance : $\geq 10000M\Omega$ at 500VAC
 - Rated voltage : 100 V_{RMS} /150V_{DC}
- ◆ Mechanical
 - Operating temperature : Gold plated: -550 °C to +125 °C
 - (Continuous) -67° F to +257° F
 - Tin plated: -40 °C to +105 °C
- ◆ Environmental data
 - Solderability (IEC 60068-2-20. Ta) :235° C, 2s
 - Resistance to soldering heat (IEC 60068-2-20. Tb) :
 - Through hole mount components :260° C, 10s

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ± 0.50

.X ± 0.30

.XX ± 0.10

.XXX ±

ANG ± 1°

照片框

ORDER INFORMATION

HISP-Dx-1Xxx-LF
SERIES | LEADFREE
1X01:01 WAY
DIP 180° 1X32:32 WAY
G:GOLD
T:TIN

DESCRIPTION: 單排IC Socket 1x32P (Pitch=1.778mm)成品圖.ROHS (無切槽)