
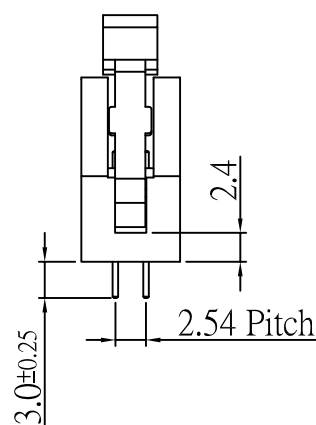
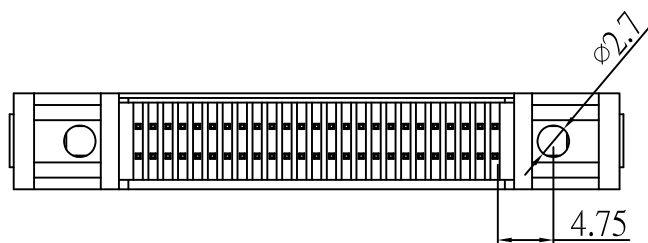
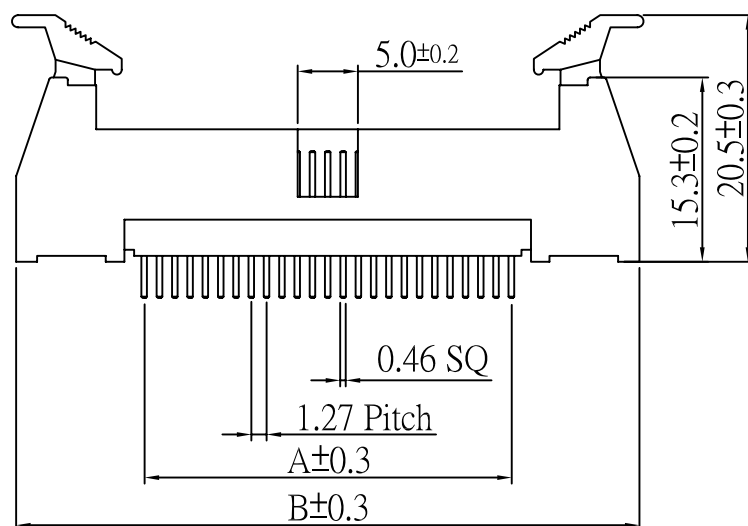
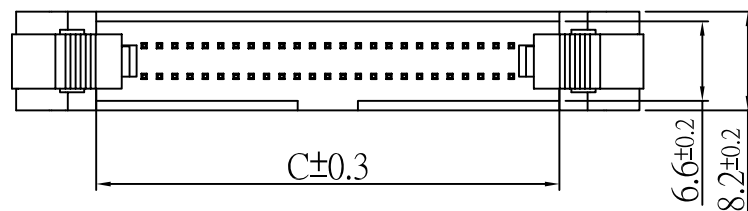


P.C.Board Layout

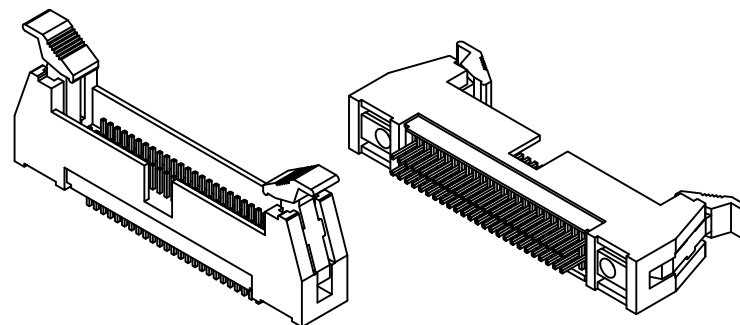

Contact:
Contact:Brass.
Insulator:PBT.
Finish:Gold flash plated over nickel.

Circuits	Dimension		
	A	B	C
10	5.08	26.15	12.86
16	8.89	29.96	16.67
20	11.43	32.50	19.21
26	15.24	36.31	23.02
30	17.78	38.85	25.56
32	19.05	40.12	26.83
34	20.32	41.39	28.10
40	24.13	45.20	31.91
44	26.67	47.74	34.45
50	30.48	51.55	38.26
52	31.75	52.82	39.53
60	36.83	57.90	44.61
68	41.91	62.98	49.69
70	43.18	64.25	50.96
80	49.53	70.60	57.31
100	62.23	83.30	70.01

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

HL-D2SL-xxx-LF
SERIES LEADFREE
010~100 WAY
SHORT LEVER
2 ROW
DIP 180°

DESCRIPTION: