
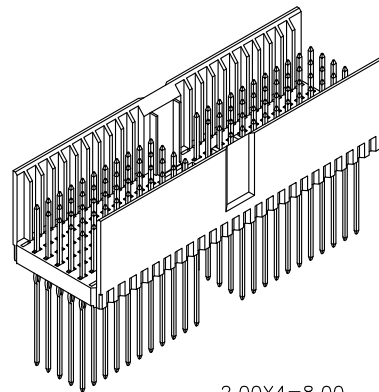


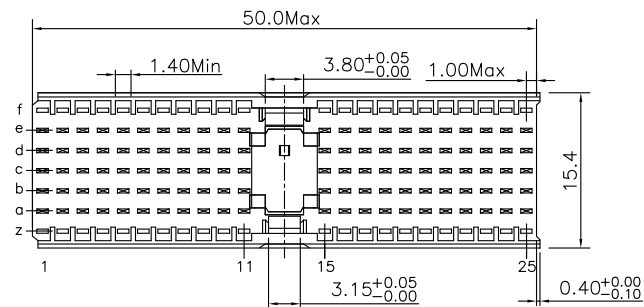

Material:

Housing: Thermoplastic Polyester Glass Filled UL94V-0.
Contacts: Copper Alloy

Electrical Characteristics:




Current Rating: 1 AMP.

Dielectric Withstanding Voltage: AC 750V For 1 minute.


Insulator Resistance: 10000MΩ min.at DC 500V.

Contact Resistance: 20mΩ max.at DC 100mA.


Operating Temperature: -55°C ~ +125°C.

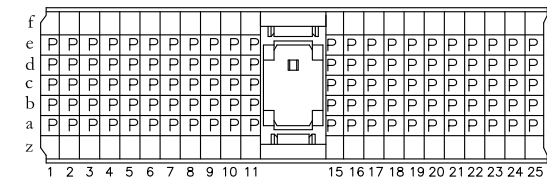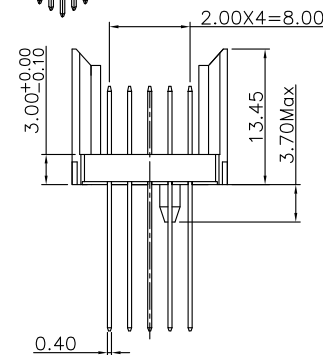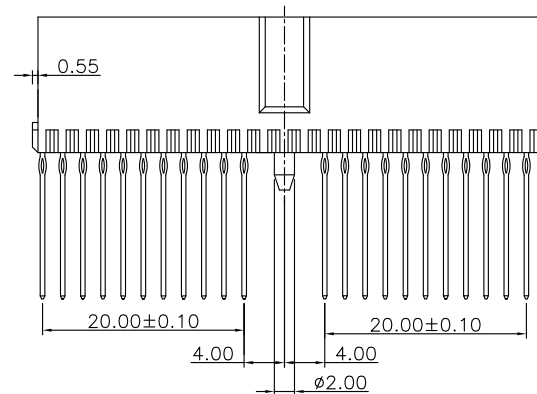

Contact Layout

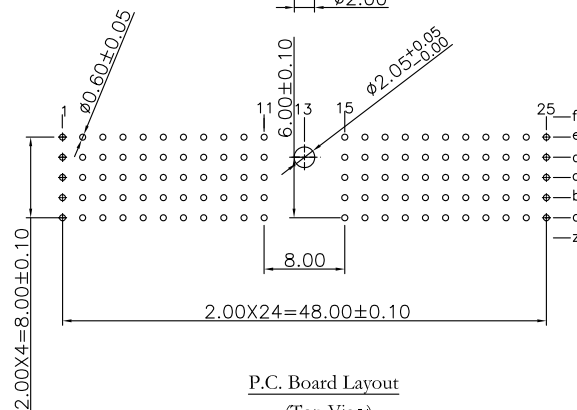

P.C. Board Layout
(Top View)

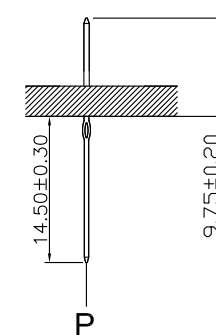

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

X. ± 0.50

CHECKED BY GENIUS

.X ± 0.25

UNIT / mm

SCALE 1 : 1

.XX ± 0.15

DATE

.XXX ±

ANG ±

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

HM7A-PP14P-110-LF

SERIES
LEADFREE
110 WAY
P TYPE
14.5mm
PRESS FIT
MALE

DESCRIPTION: Hard Metric Connector Male Type P