



Material:

Housing: Thermoplastic Polyester Glass Filled UL94V-0.
Contacts: Copper Alloy.


Electrical Characteristics:

Current Rating: 1 AMP.
Dielectric Withstanding Voltage: AC 750V For 1 minute.
Insulator Resistance: 10000MΩ min. at DC 500V.
Contact Resistance: 20mΩ max. at DC 100mA.
Operating Temperature: -55°C ~+125°C .


***RoHS Compliant**

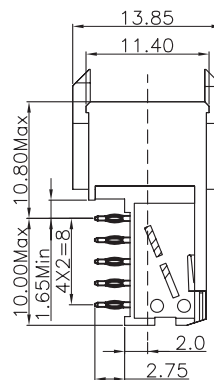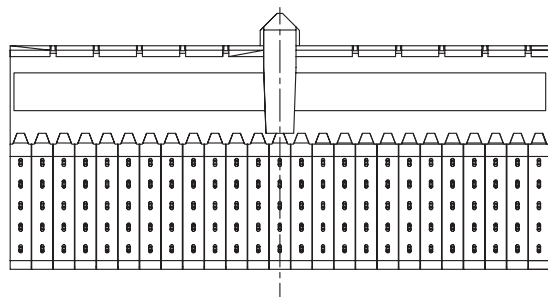


None Shielded



With Top Body Shielded



With Top Body Shielded
and Bottom Shielded

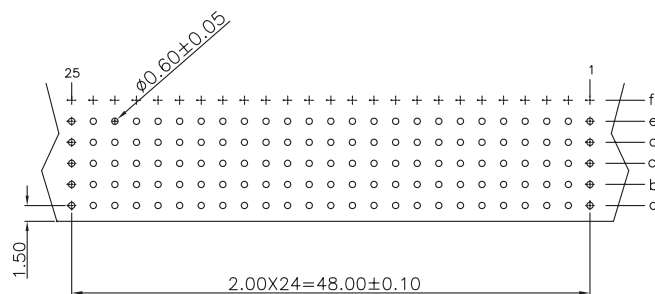

P.C. Board Layout
(Top View)

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PJECTION

X. ± 0.50
.X ± 0.25
.XX ± 0.15
.XXX ±
ANG ±

照片框

ORDER INFORMATION

HM7AB-SQx-125-LF

SERIES

FEMALE

90° PRESSFIT

125WAY LEADFREE

X: NONE SHIELDED
T: TOP BODY SHIELDED
A: TOP BODY SHIELDED AND
BOTTOM SHIELDED

DESCRIPTION: