

Material:

Housing: Thermoplastic Polyester Glass Filled UL94V-0.

Contacts: Copper Alloy

Electrical Characteristics:

Current Rating: 1 AMP.



Dielectric Withstanding Voltage: AC 750V For 1 minute.

Insulator Resistance: 10000MΩ min. at DC 500V.


Contact Resistance: 20mΩ max. at DC 100mA.

Operating Temperature: -55°C ~ +125°C .


***RoHS Compliant**

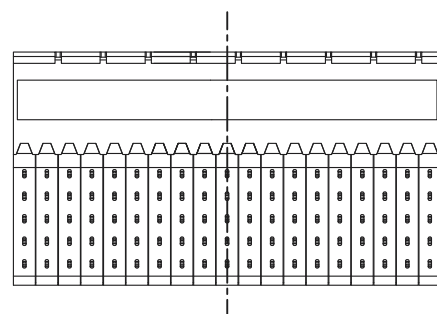


None Shielded



With Top Body Shielded



With Top Body Shielded
and Bottom Shielded

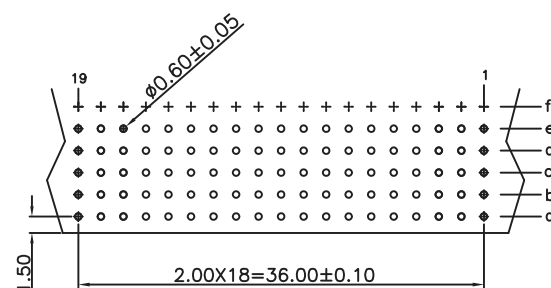

P.C. Board Layout
(Top View)

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

X. ± 0.50

CHECKED BY GENIUS

.X ± 0.25

UNIT / mm

SCALE 1 : 1

.XX ± 0.15

DATE

.XXX ±

ANG ±

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

HM7B-SQx-095-LF

SERIES

LEADFREE

95 WAY

X: NONE SHIELDED

T: WITH TOP BODY SHIELDED

A: WITH TOP BODY SHIELDED
AND BOTTOM SHIELDED

FEMALE

90° PRESS FIT

DESCRIPTION: Hard Metric Connector Female Right Angle Type