


• **MATERIALS:(RoHS Compliant)**

Housing : Plastic thermoplastic
P.B.T UL94V-0 black
Contacts : Phosphor bronze gold
selective plated
Front Shell : Steel nickel plated
over copper

• **ELECTRICAL CHARACTERISTICS**

Contact Current Rating: 1 Amp
Dielectric Withstanding Voltage: 500V AC
Insulation Resistance: 500M Ω /Min
Contact Resistance: 35m Ω /Max
Operation Temperature: -55°C ~ +105°C

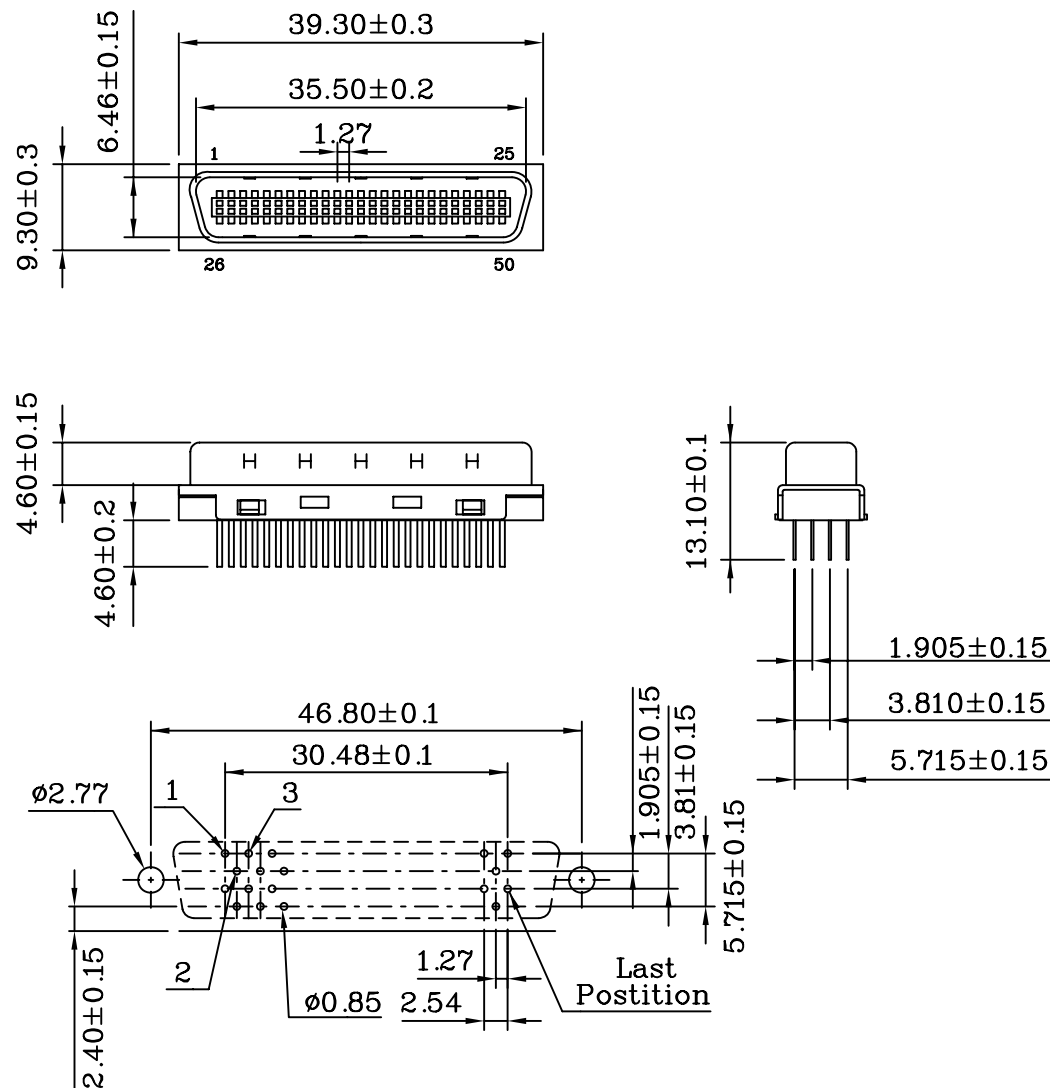

PCB LAYOUT

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. $\pm$

.X $\pm$

.XX $\pm$

.XXX $\pm$

ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

HPC-PD-050-LF
SERIES | LEADFREE
50 WAY
DIP 180°
MALE

DESCRIPTION: 1.27mm (.050") Ribbon 50Pos Plug Headers Vertical Mount Type