
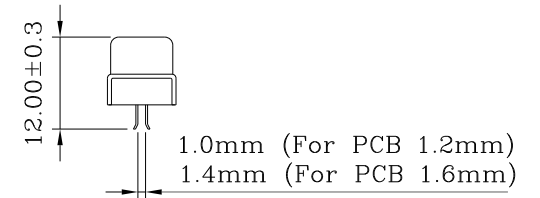
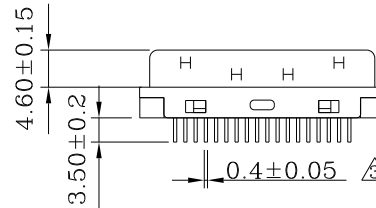


● **MATERIALS: (RoHS Compliant)**

Housing: Plastic Thermoplastic  
P.B.T UL94V-0 Black  
Contacts: Phosphor Bronze Gold  
Selective Plated  
Front Shell: Steel Nickel Plated  
Over Copper

● **ELECTRICAL CHARACTERISTICS:**

Contact Current Rating: 0.5 Amp  
Dielectric Withstanding Voltage: 500V AC  
Insulation Resistance: >500MΩ/Min  
Contact Resistance: 35mΩ/Max  
Operation Temperature: -55°C ~ +85°C

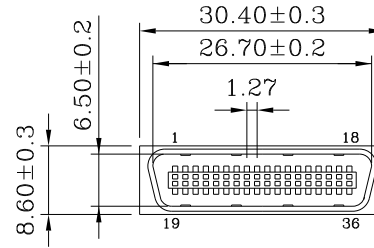

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

**RoHS Compliant**

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±

PPOJECTION

照片框

**ORDER INFORMATION**

HPD-PExx-36-LF  
SERIES | | LEADFREE  
| | 36 WAY  
| | 12:EDGE 1.2mm  
| | 16:EDGE 1.6mm  
MALE

DESCRIPTION:1.27mm (.050") Ribbon 36Pos Plug Connector Clip P.C.B Assemble Type