

**FEATURES:**



- Half Pitch 1.27mm(.050") series
- Centronic male connector I.D.C type for cable
- Assembly hood: plastic(steel inner shell)
- Fully EMI/RFI shielded

**MATERIALS:**





- Housing And Cover: Plastic thermoplastic  
P.B.T UL94V-0 black
- Contacts: Phosphor bronze gold  
selective plated
- Shell: Steel nickel plated over copper

**ELECTRICAL:**


- Current Rating: 1 Amp
- Insulation Resistance: 500MΩ/Min
- Withstanding Voltage: 500V AC/Min
- Contact Resistance: 35mΩ Max
- Temperature Range: -55°C ~ +105°C

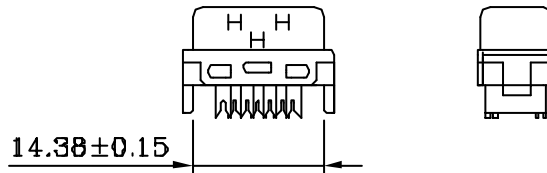

Termination Cover  
(1 Places)

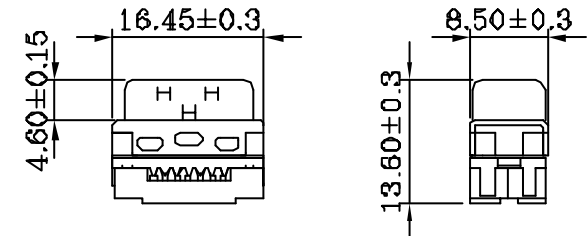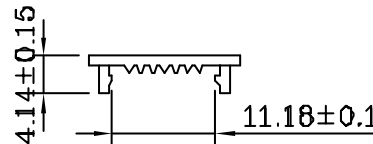

Wire Holder  
(2 Places)



RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X. ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

HPC-PF-014-LF  
SERIES | LEADFREE  
14 WAY  
IDC  
MALE

DESCRIPTION: 1.27mm(.050") Pitch Centronic 14P Male Connector I.D.C Assembly Type

煜倫股份有限公司

www.morethanall.com