

NOTE:

1.0 CONNECTOR ELECTRICAL CHARACTERISTICS:

1.1 CONTACT CURRENT RATING: 1.0 AMPERE

1.2 DIELECTRIC WITHSTANDING VOLTAGE: AC 500 V r.m.s

1.3 INSULATION RESISTANCE: 500 MEGOHMS Min.

1.4 CONTACT RESISTANCE: 35 MILLIOHMS Max.INITIAL

1.5 OPERATING TEMPERATURE: -55°C TO +85°C

2.0 OTHERS:

2.1 APPLICATION:

WIRE GAUGE: 30 AWG (0.05mm²) OR 28 AWG (0.08mm²)

2.2 PARTS 1, 2 & 3 ASSEMBLED,THE OTHER PARTS ARE ATTACHED.

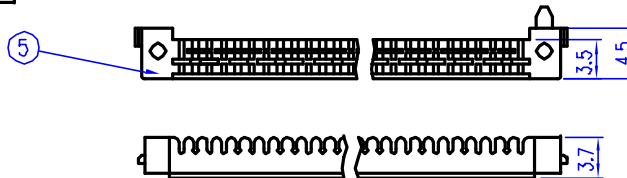
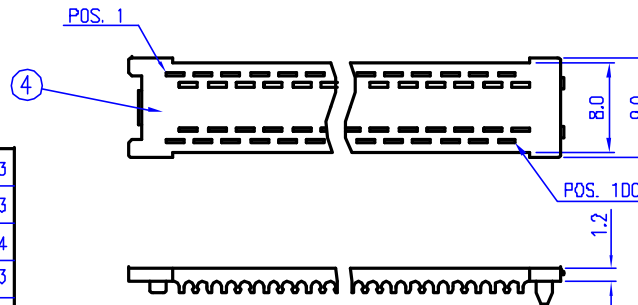

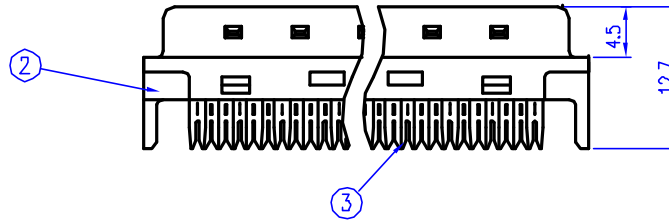
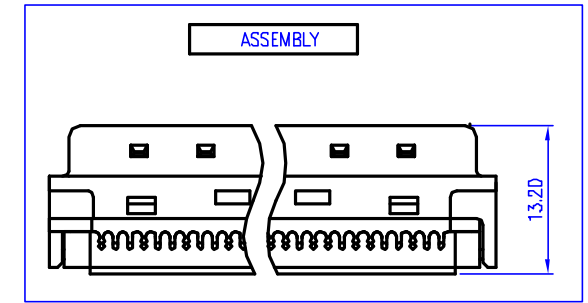
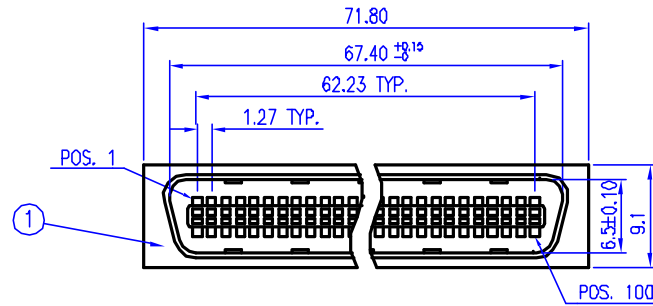


TABLE A

5	WIRE HOLDER	2	THERMOPLASTIC,UL 94V-0	SEE PRODUCT NUMBERING CODE 3
4	COVER	1	THERMOPLASTIC,UL 94V-0	SEE PRODUCT NUMBERING CODE 3
3	CONTACT	100	COPPER ALLOY	SEE PRODUCT NUMBERING CODE 4
2	INSULATOR	1	THERMOPLASTIC, UL 94V-0	SEE PRODUCT NUMBERING CODE 3
1	FRONT SHELL	1	STEEL	SEE PRODUCT NUMBERING CODE 5
ITEM	PART NAME	QTY/EA	MATERIAL	FINISH

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

HPC-PF-100-LF
SERIES | LEADFREE
100 WAY
IDC
MALE

DESCRIPTION: HALF PITCH RIBBON CONNECTOR MALE, IDC TYPE, 100 POS. (CUSTOMER DRAWING)