



• MATERIALS:(RoHS Compliant)

Housing And Cover: Plastic thermoplastic
 P.B.T UL94V-0 black
 Contacts: Phosphor bronze gold selective plated
 Front Shell: Steel nickel plated over copper


• ELECTRICAL CHARACTERISTICS

Contact Current Rating: 1 Amp
 Dielectric Withstanding Voltage: 500V AC
 Insulation Resistance: 500MΩ/Min
 Contact Resistance: 35mΩ/Max
 Operation Temperature: -55°C ~ +105°C

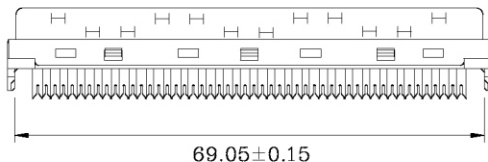


HPC-PFM-100-LF
LEADFREE


RoHS Compliant

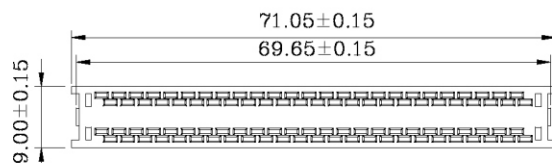





Termination Cover
 (1 Places)

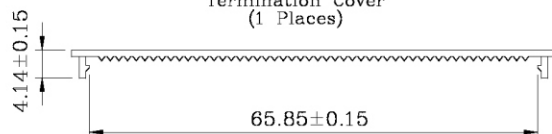

Wire Holder
 (2 Places)



66.72±0.1

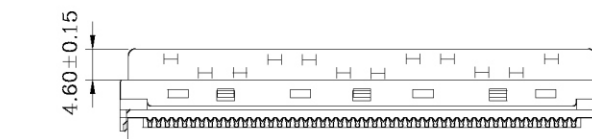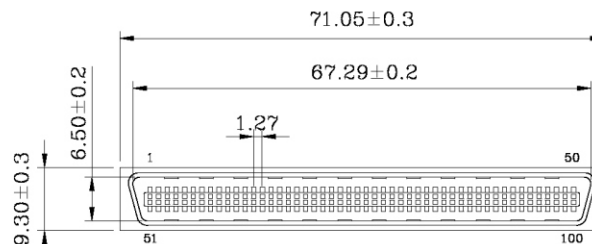

PART NO. **HPC-PFM-100**

DWG NO. **HPC-PFM-100**

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION

TOLERANCES ARE

.X ± 0.2
 .XX ±
 .XXX ±
 AWG

DESCRIP TION:

AREA

REVISIONS

HK

DATE








煜倫股份有限公司

FEATURES:

- Round cable straight exit
- Strain Relief Staple With Jackscrew
- Back shell desing by Die-Cast
- Excellent EMI/RFI protection

MATERIALS:

- Back Shell: Zinc plated nickel over copper
- Jackscrews: steel nickel plated over copper
- Screw: steel nickel plated over copper
- Cable Clipper: steel nickel plated

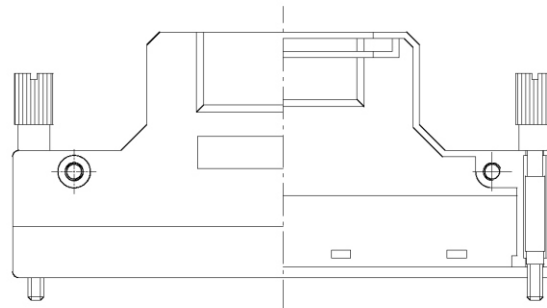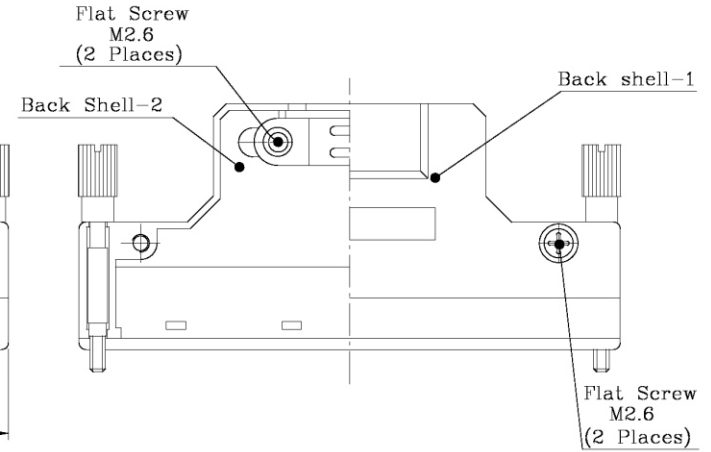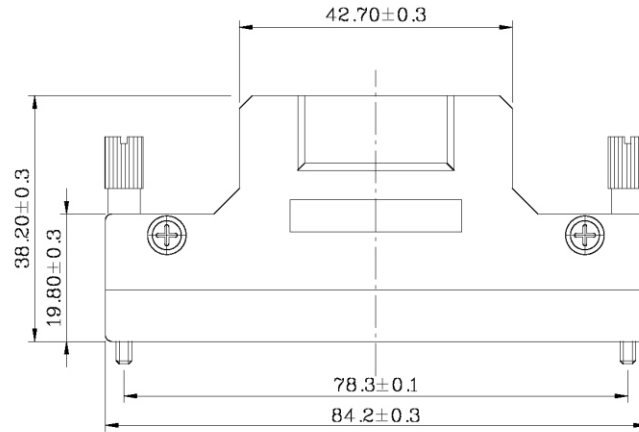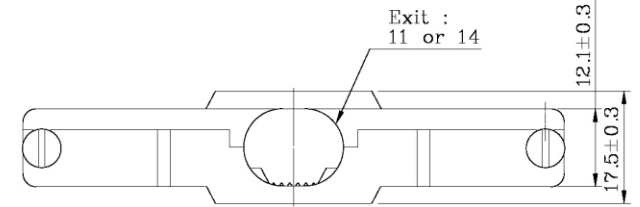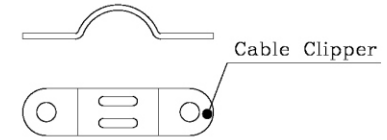

MORETHANALL
CONNECTORS
ASSEMBLIES

PART NO. **HPC-PFM-100**

DWG NO. **HPC-PFM-100**

CHECKED BY CY

TOLERANCES ARE

DESCRIP TION:

FILE NO.

DRAWING BY

.X ± 0.2
.XX ±
.XXX ±
AWG

AREA

REVISIONS

HK

DATE

煜倫股份有限公司

UNIT / mm

SCALE 1:1

PROJECTION

