

● MATERIALS: (RoHS Compliant)




Housing And Cover: Plastic Thermoplastic
P.B.T UL94V-0 Black
Contacts: Phosphor Bronze Gold
Selective Plated
Front Shell: Steel Nickel Plated
Over Copper

● ELECTRICAL CHARACTERISTICS:

Contact Current Rating: 0.5 Amp
Dielectric Withstanding Voltage: 500V AC
Insulation Resistance: >500MΩ/Min
Contact Resistance: 35mΩ/Max
Operation Temperature: -55°C ~ +85°C

● MATERIALS: (RoHS Compliant)

Back Shell: Zinc Alloy Nickel Plated Over Copper
Flat Screws: Steel Nickel Plated Over Copper
Cable Clipper: Steel Nickel Plated Over Copper
Spring Latches: Stainless Steel

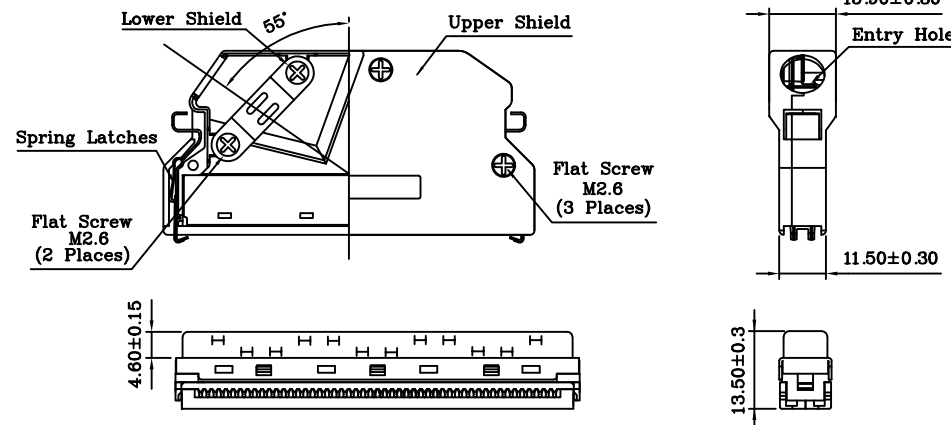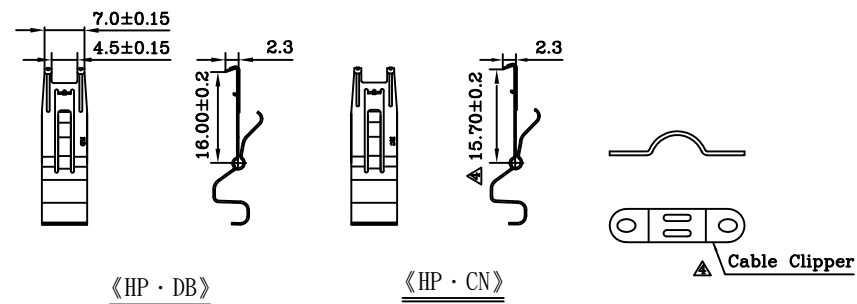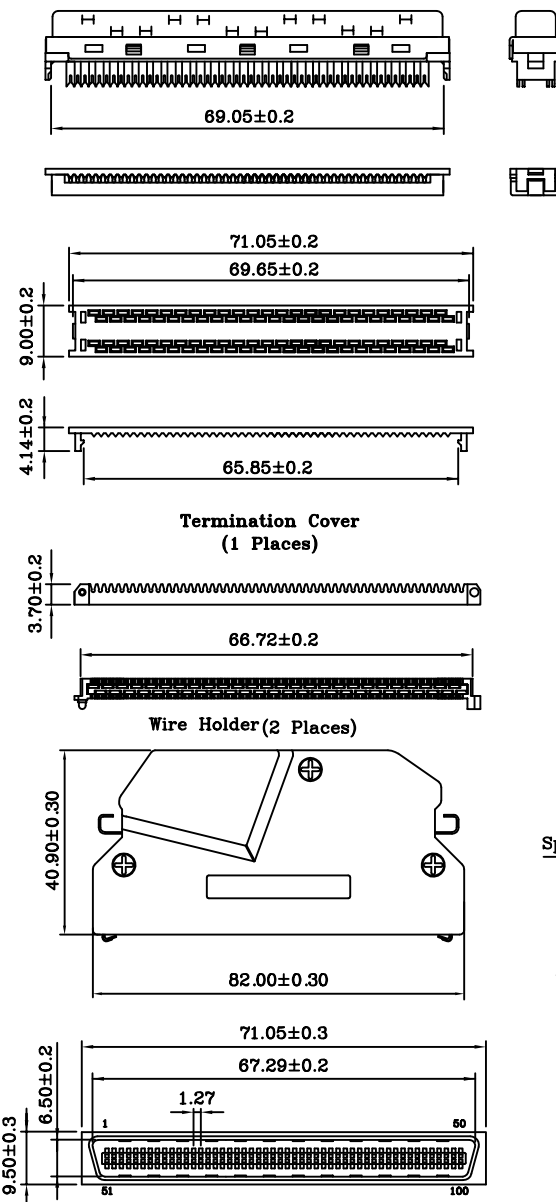

RoHS Compliant

TOLERANCES ARE

照片框

ORDER INFORMATION

HPD-PFWA-100-LF
SERIES | LEADFREE
100 WAY
SLANT
W TYPE COVER
IDC
MALE

DESCRIPTION: 1.27mm (.050") Ribbon 100Pos Cable Plug Connector I.D.C Assembly Type

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X.±
.X±
.XX±
.XXX±
ANG±