


● **MATERIALS: (RoHS Compliant)**

Housing: Plastic Thermoplastic  
P.B.T UL94V-0 Black

Contacts: Phosphor Bronze Gold  
Selective Plated

Front Shell: Steel Nickel Plated Over Copper

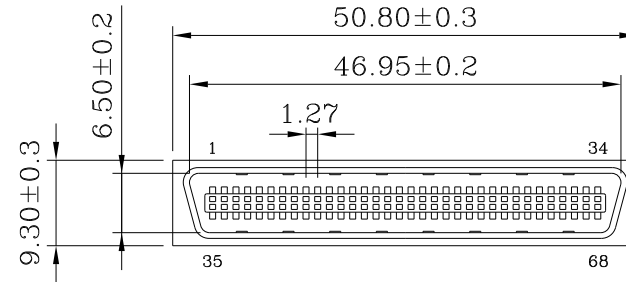

● **ELECTRICAL CHARACTERISTICS:**



Contact Current Rating: 0.5 Amp

Dielectric Withstanding Voltage: 500V AC

Insulation Resistance: >500MΩ/Min

Contact Resistance: 35mΩ/Max

Operation Temperature: -55°C ~ +85°C

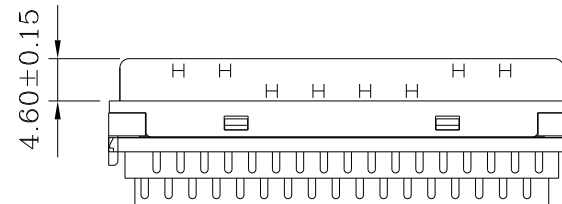

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

**RoHS Compliant**

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

TOLERANCES ARE

X.±

.X±

.XX±

.XXX±

ANG±

PJECTION

照片框

**ORDER INFORMATION**

HPC-PM-068-LF  
SERIES | LEADFREE  
68 WAY  
MOLED  
MALE

DESCRIPTION: 1.27mm(.050") Ribbon 68Pos Cable Plug Connector Solder Molded type