





● **MATERIALS: (RoHS Compliant)**

Housing: Plastic Thermoplastic  
 P.B.T UL94V-0 Black  
 Contacts: Phosphor Bronze Gold  
 Selective Plated  
 Front Shell: Steel Nickel Plated Over Copper

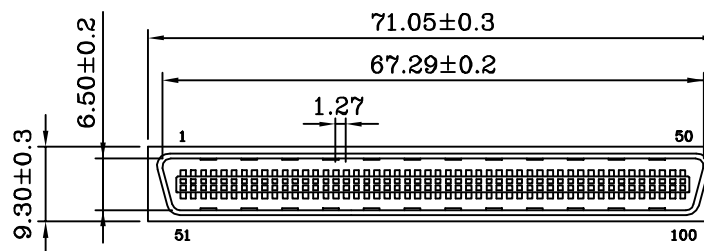

● **ELECTRICAL CHARACTERISTICS:**

Contact Current Rating: 0.5 Amp  
 Dielectric Withstanding Voltage: 500V AC  
 Insulation Resistance: >500MΩ/Min  
 Contact Resistance: 35mΩ/Max  
 Operation Temperature: -55°C ~ +85°C

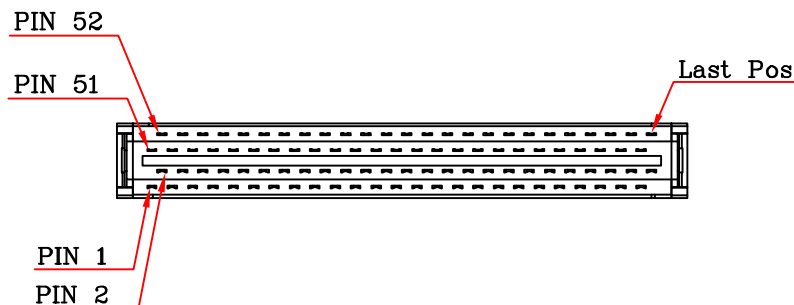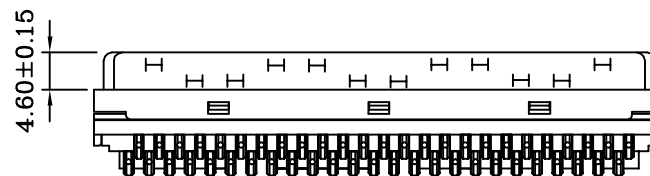

**RoHS Compliant**

TOLERANCES ARE

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PJECTION

照片框

**ORDER INFORMATION**

HPC-PM-100-LF  
 SERIES | LEADFREE  
 | 100 WAY  
 | MOLDED  
 MALE

DESCRIPTION: 1.27mm(.050") Ribbon 100 Pos Cable Plug Connector Solder Molded type