

● **MATERIALS: (RoHS Compliant)**

Housing: Plastic Thermoplastic
P.B.T UL94V-0 Black
Contacts: Phosphor Bronze Gold
Selective Plated

Front Shell: Steel Nickel Plated Over Copper

● **ELECTRICAL CHARACTERISTICS:**





Contact Current Rating: 0.5 Amp

Dielectric Withstanding Voltage: 500V AC

Insulation Resistance: >500MΩ/Min

Contact Resistance: 35mΩ/Max

Operation Temperature: -55°C ~ +85°C

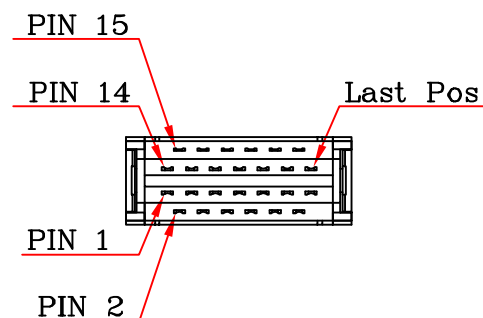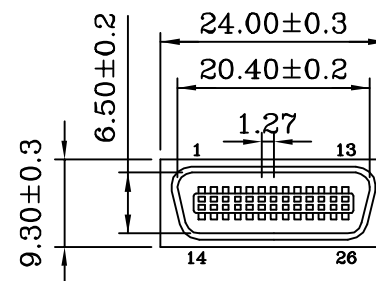

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X.±

CHECKED BY GENIUS

.X±

UNIT / mm

SCALE 1:1

.XX±

.XXX±

DATE

ANG±

SIZE A4

PJECTION

煜倫股份有限公司

www.morethanall.com

ORDER INFORMATION

HPC-PS-026-LF
SERIES | LEADFREE
26 WAY
SOLDER
MALE

DESCRIPTION: 1.27mm(.050") Ribbon 26Pos Cable Plug Connector Solder Assembly type