


● **MATERIALS: (RoHS Compliant)**


- Housing: Plastic Thermoplastic
P.B.T UL94V-0 Black
- Contacts: Phosphor Bronze Gold
Selective Plated
- Front Shell: Steel Nickel Plated
Over Copper
- Bracket: Zinc Alloy, Nickel Plated
Over Copper

● **ELECTRICAL CHARACTERISTICS:**


- Contact Current Rating: 0.5 Amp
- Dielectric Withstanding Voltage: 500V AC
- Insulation Resistance: >500MΩ/Min
- Contact Resistance: 35mΩ/Max
- Operation Temperature: -55°C ~ +85°C

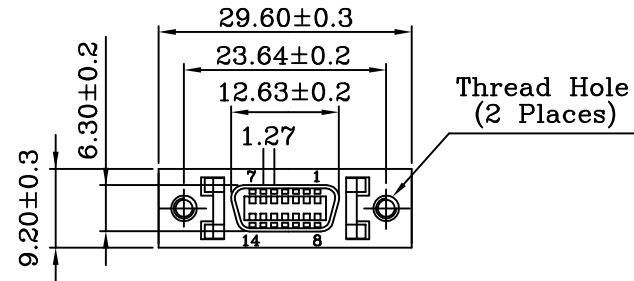

L Type

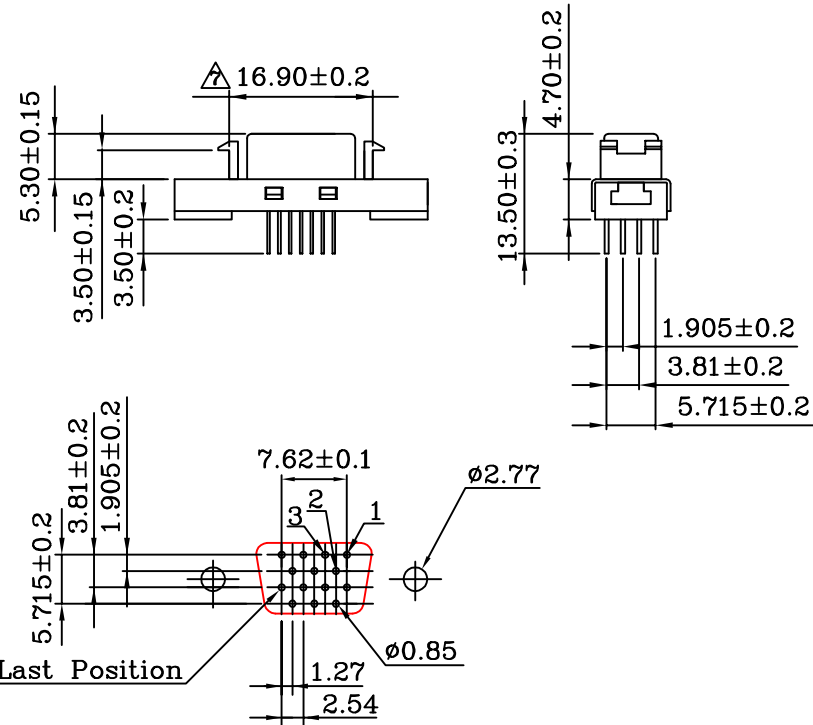

PCB Layout



RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X.±
.X±
.XX±
.XXX±
ANG ±

PJECTION

ORDER INFORMATION

HPC-SDL-014-LF
SERIES | LEADFREE
| 14WAY
| LOCK
| DIP 180°
FEMALE

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: