



• MATERIALS:(RoHS Compliant)

- Housing: Plastic Thermoplastic
P.B.T UL94V-0 Black
- Contacts: Phosphor Bronze Gold
Selective Plated
- Front Shell: Steel Nickel Plated
Over Copper
- Bracket: Zinc Alloy, Nickel Plated
Over Copper

• ELECTRICAL CHARACTERISTICS:

- Contact Current Rating: 1 Amp
- Dielectric Withstanding Voltage: 500V AC
- Insulation Resistance: >500MΩ/Min
- Contact Resistance: 35mΩ/Max
- Operation Temperature: -55°C ~ +105°C

HPC-SDX-026-LF
LEADFREE
RoHS Compliant

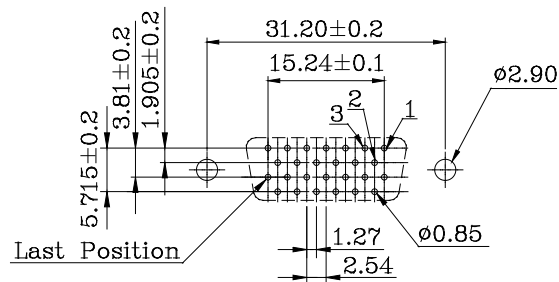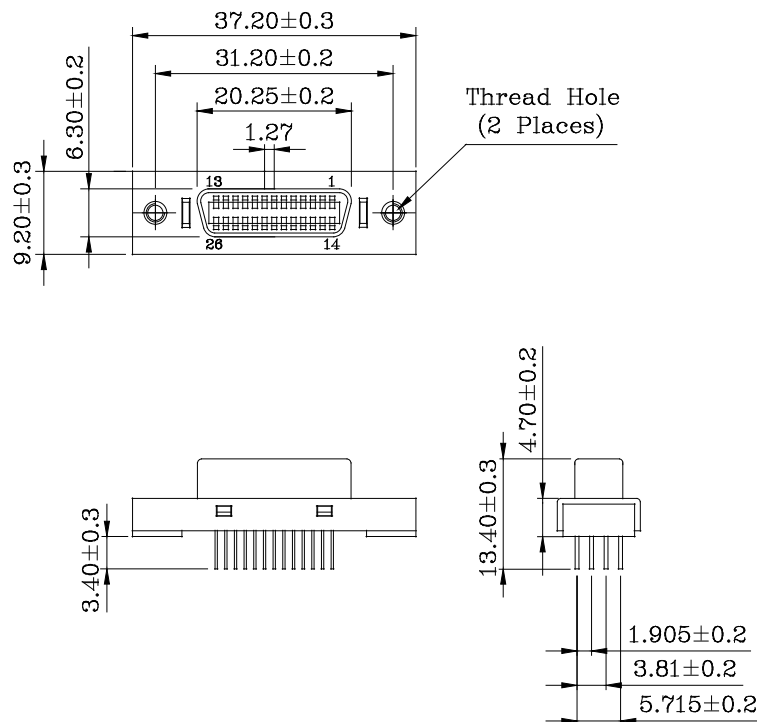

PCB Layout



PART NO. HPC-SDX-026

DWG NO. HPC-SDX-026

FILE NO.


UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

- .X ± 0.2
- .XX ±
- .XXX ±
- AWG

DESCRIPTION:

1.27mm (.050") Ribbon 26Pos
Receptacles Headers Vertical
Mount Type

AREA

REVISIONS

HK

DATE

焯倫股份有限公司