
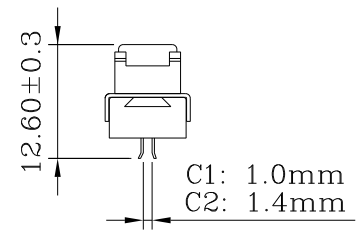
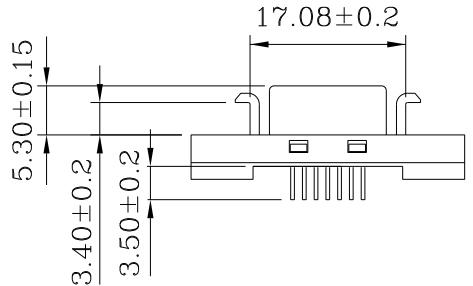


• **MATERIALS:(RoHS Compliant)**

- Housing: Plastic Thermoplastic
P.B.T UL94V-0 Black
- Contacts: Phosphor Bronze Gold
Selective Plated
- Front Shell: Steel Nickel Plated
Over Copper
- Bracket: Steel Nickel Plated Over Copper

• **ELECTRICAL CHARACTERISTICS:**

- Contact Current Rating: 1 Amp
- Dielectric Withstanding Voltage: 500V AC
- Insulation Resistance: >500MΩ/Min
- Contact Resistance: 35mΩ/Max
- Operation Temperature: -55°C ~ +105°C

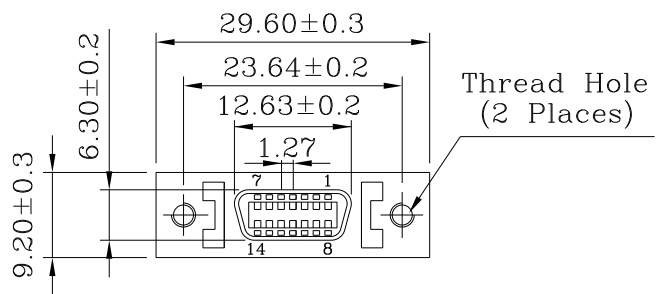

HPC-SEL-014-LF
LEADFREE

RoHS Compliant



煜倫股份有限公司

PART NO. HPC-SEL-014		CHECKED BY CY		TOLERANCES ARE .X ± 0.2 .XX ± .XXX ± AWG	DESCRIPTION: 1.27mm (.050") Ribbon 14Pos Receptacles Connector Clip P.C.B Type	AREA	REVISIONS	HK	DATE
DWG NO. HPC-SEL-014		DRAWING BY							
FILE NO.		PROJECTION							
UNIT / mm	SCALE 1:1								