





• **MATERIALS:(RoHS Compliant)**

Housing And Cover: Plastic Thermoplastic  
P.B.T UL94V-0 Black  
Contacts: Phosphor Bronze Gold  
Selective Plated  
Front Shell: Steel Nickel Plated  
Over Copper  
Bracket: Steel Nickel Plated  
Over Copper  
Boardlock: Brass Tin Plated  
Over Copper

• **ELECTRICAL CHARACTERISTICS:**

Contact Current Rating: 1 Amp  
Dielectric Withstanding Voltage: 500V AC  
Insulation Resistance: >500MΩ/Min  
Contact Resistance: 35mΩ/Max  
Operation Temperature: -55°C ~ +105°C

HPC-SRL440-068-LF  
440:#4-40 LEADFREE  
RoHS Compliant

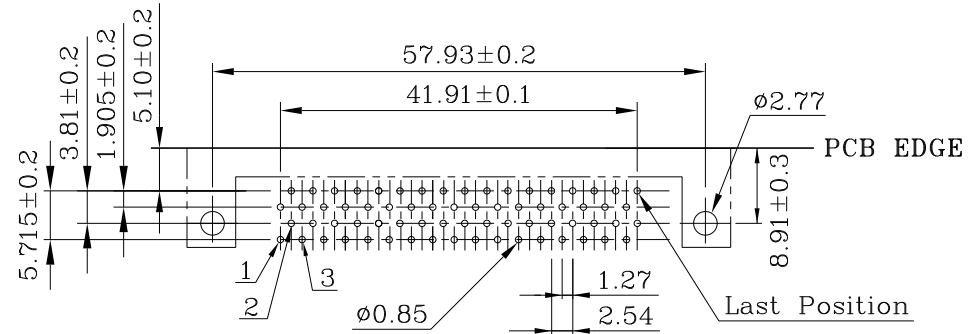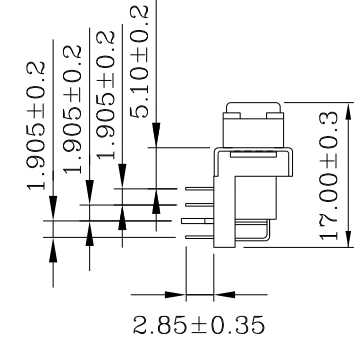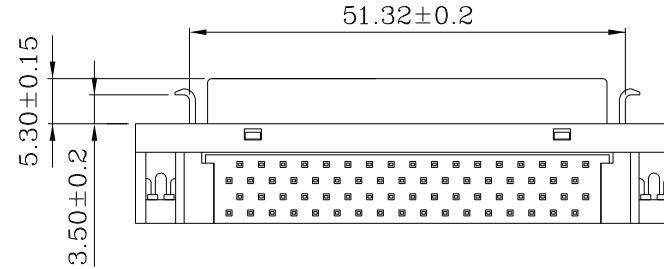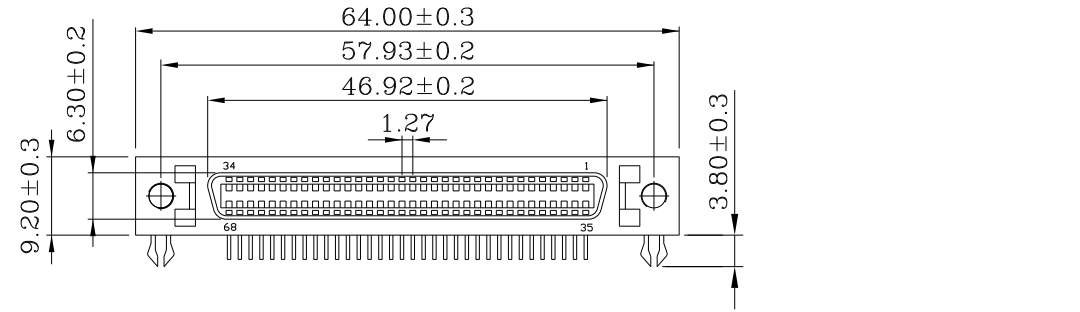

PCB Layout

	PART NO. HPC-SRL440-068		TOLERANCES ARE .X ± 0.2 .XX ± .XXX ± AWG	DESCRIPTION: 1.27mm (.050") Ribbon 68Pos Receptacles Headers Right-Angle Mount Type	AREA REVISIONS HK DATE
	DWG NO. HPC-SRL440-068 FILE NO.	CHECKED BY CY DRAWING BY			
焯倫股份有限公司	UNIT / mm SCALE 1:1	PROJECTION			