

**FEATURES:**

- Half pitch 1.27mm(.050") series
- Ribbon type right angle dip mount connector
- Bracket with latch block and without latch block
- Steel body provide EMI/RFI shielded



**MATERIALS:**

- Housing and cover: Plastic thermoplastic P.B.T UL94V-0
- Contact: Phosphor bronze gold selective plated over Tin
- Shell: Steel, Nickel or tin plated over copper
- Bracket: Steel, Nickel plated over copper
- Boardlock: Phosphor Bronze Tin plated over copper

**ELECTRICAL:**

- Current Rating: 1 Amp
- Insulation Resistance: 500MΩ/Min
- Withstanding Voltage: 500V AC/Min
- Contact Resistance: 35mΩ Max
- Temperature Range: -55°C ~ +105°C

HPC-SRLM25-026-LF  
LEADFREE  
M2.5 TREADED HOLES  
RoHS Compliant

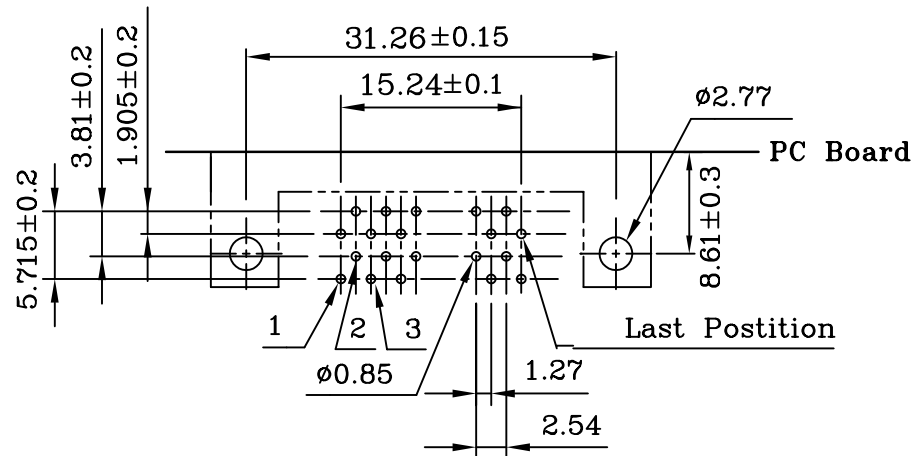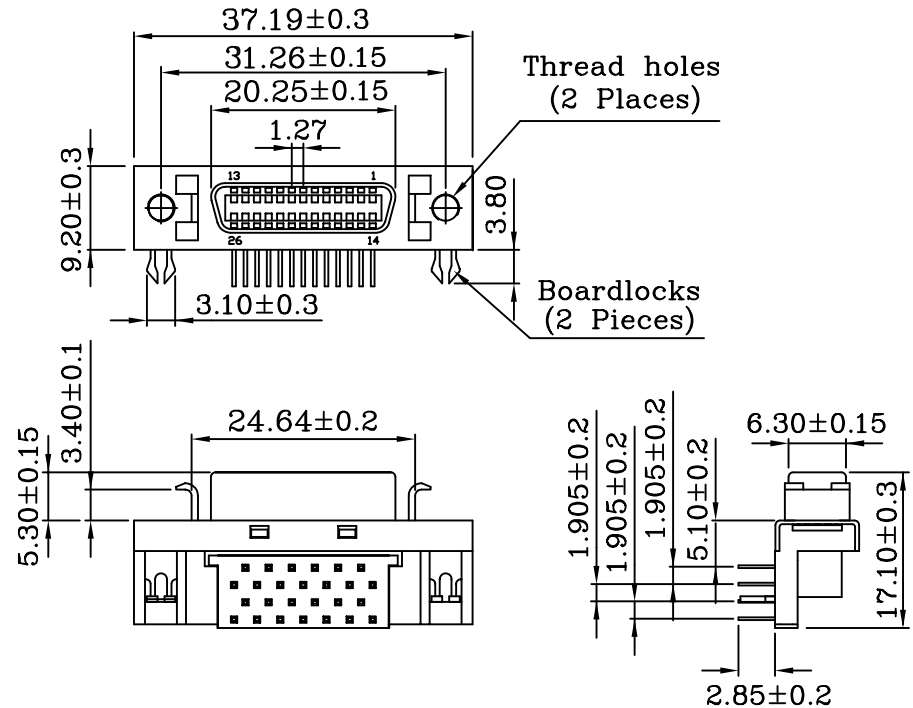

PC Board Mounting Dimensions



PART NO. HPC-SRLM25-026

DWG NO. HPC-SRLM25-026

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION

TOLERANCES ARE

.X ± 0.2  
.XX ±  
.XXX ±  
AWG

DESCRIPTION:

AREA

1.27mm(.050") Pitch Centronic 26P Female Connector Right angle Dip mount Type

REVISIONS

HK

DATE

煜倫股份有限公司