

• **MATERIALS:(RoHS Compliant)**

Housing And Cover : Plastic thermoplastic
P.B.T UL94V-0 black
Contacts : Phosphor bronze gold
selective plated
Front Shell : Steel nickel plated
over copper
Boardlock : Brass Tin plated
over copper
Bracket : Steel nickel plated
over copper




• **ELECTRICAL CHARACTERISTICS**

Contact Current Rating: 1 Amp
Dielectric Withstanding Voltage: 500V AC
Insulation Resistance: 500MΩ/Min
Contact Resistance: 35mΩ/Max
Operation Temperature: -55°C ~ +105°C

HPC-SRX-014(26)(50)-LF
LEADFREE

RoHS Compliant

NO OF CONTACTS	A	B	C	D	E	F
14	29.57	23.64	12.63	23.64	7.62	
26	37.19	31.26	20.25	31.26	15.24	
50	52.50	46.50	35.49	46.50	30.48	

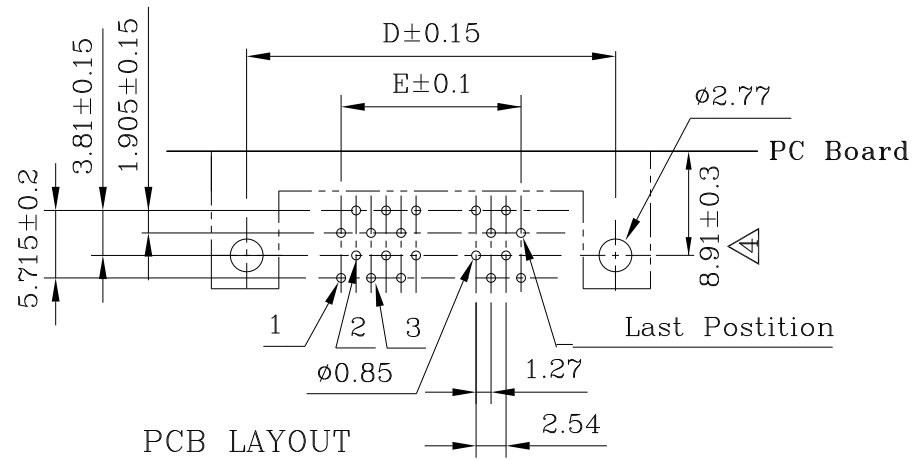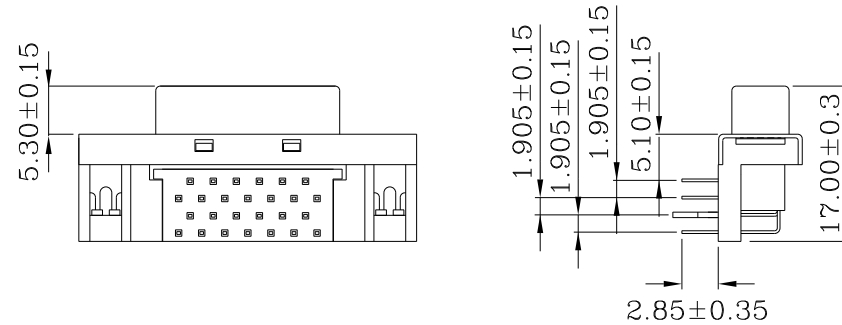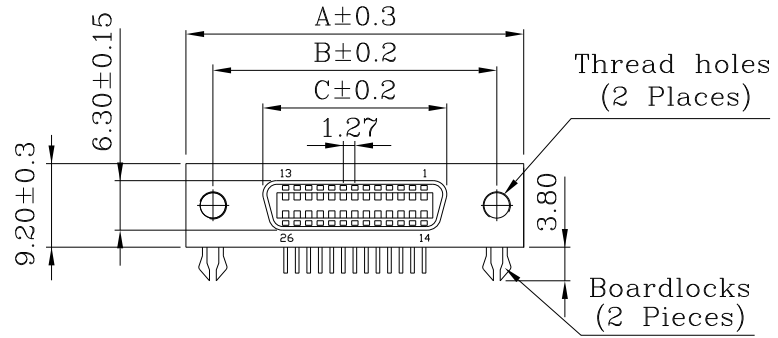

MORETHANALL
CONNECTORS
ASSEMBLIES

PART NO. HPC-SRX-014(26)(50)

DWG NO. HPC-SRX-014(26)(50)

CHECKED BY CY

TOLERANCES ARE

DESCRIP TION:

1.27mm (.050") Ribbon Series
Receptacles Headers Right-Angle
Mount Type

煜倫股份有限公司

FILE NO.

DRAWING BY

.X±0.2
.XX±0.1
.XXX±
AWG

AREA

REVISIONS

HK

DATE

UNIT / mm

SCALE 1:1

PROJECTION

