


♦ MATERIALS:(RoHS Compliant)

Housing And Cover : Plastic thermoplastic
P.B.T UL94V-0 black
Contacts : Phosphor bronze gold
selective plated
Front Shell : Steel nickel plated
over copper
Boardlock : Brass Tin plated
over copper
Bracket : Steel nickel plated
over copper

♦ ELECTRICAL CHARACTERISTICS


Contact Current Rating: 1 Amp
Dielectric Withstanding Voltage: 500V AC
Insulation Resistance: 500MΩ/Min
Contact Resistance: 35mΩ/Max
Operation Temperature: -55°C ~ +105°C

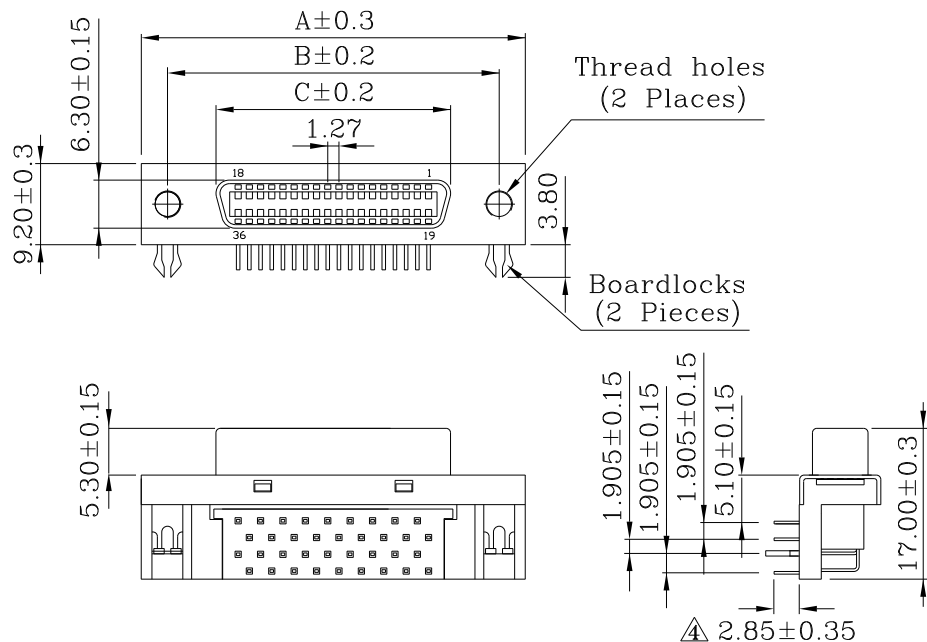

HPC-SRX-020(36)(40)(68)(100)-LF
LEADFREE

RoHS Compliant

NO OF CONTACTS	A	B	C	D	E	F
20	33.40	27.40	16.44		27.45	11.43
36	43.54	37.61	26.60		37.61	21.59
40	46.15	40.15	29.14		40.15	24.13
68	64.00	57.92	46.92		57.60	41.91
100	84.18	78.23	67.10		78.10	62.23

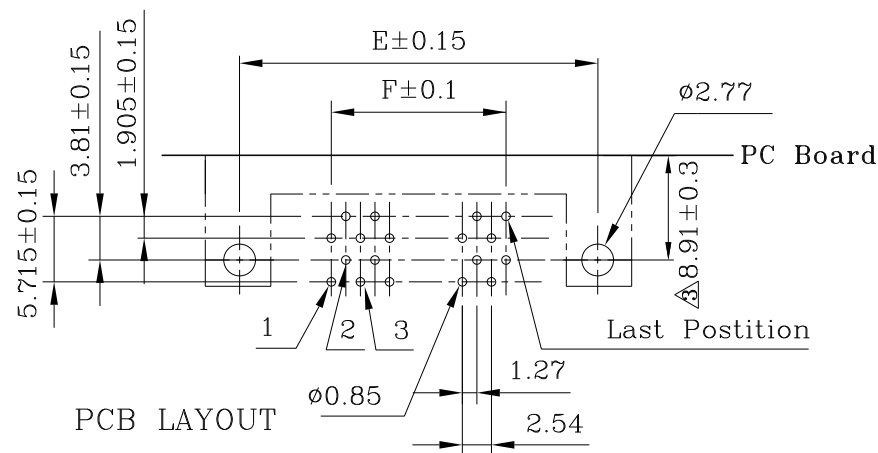

MORETHANALL
CONNECTORS
ASSEMBLIES

PART NO. HPC-SRX-020(36)(40)(68)(100)

DWG NO. HPC-SRX-020(36)(40)(68)(100)

CHECKED BY CY

TOLERANCES ARE

DESCRIP TION:

1.27mm (.050") Ribbon Series
Receptacles Headers Right-Angle
Mount Type

煜倫股份有限公司

FILE NO.

DRAWING BY

.X±0.2
.XX±0.1
.XXX±
AWG

AREA

REVISIONS

HK

DATE

UNIT / mm

SCALE 1:1

PROJECTION

