
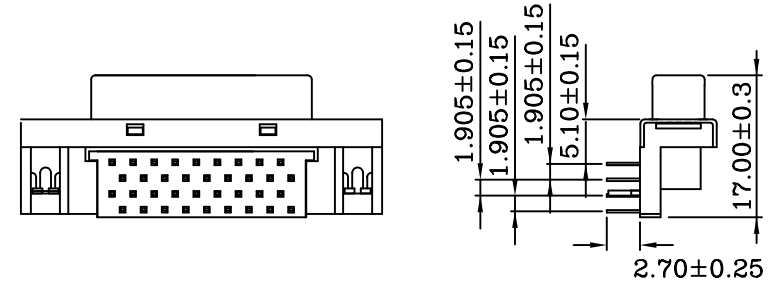


• **MATERIALS:(RoHS Compliant)**

Housing And Cover : Plastic thermoplastic
 P.B.T UL94V-0 black
 Contacts : Phosphor bronze gold
 selective plated
 Front Shell : Steel nickel plated
 over copper
 Boardlock : Brass Tin plated
 over copper
 Bracket : Steel nickel plated
 over copper



• **ELECTRICAL CHARACTERISTICS**

Contact Current Rating: 1 Amp
 Dielectric Withstanding Voltage: 500V AC
 Insulation Resistance: 500MΩ/Min
 Contact Resistance: 35mΩ/Max
 Operation Temperature: -55°C ~ +105°C

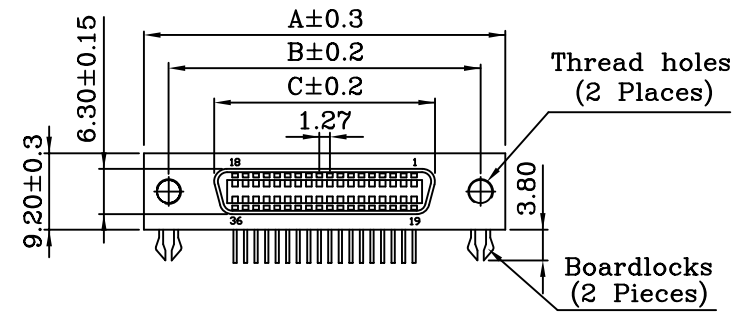

HPC-SRXH-xxx-LF
 LEADFREE
 RoHS Compliant

NO OF CONTACTS	A	B	C	D	E	F
20	33.40	27.40	16.44	20.83	27.45	11.43
36	43.54	37.61	26.60	31.05	37.61	21.59
68	64.00	57.92	46.92	51.32	57.60	41.91
100	84.18	78.23	67.10		78.10	62.23

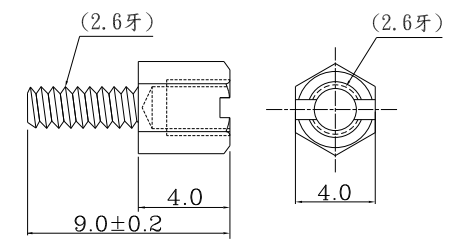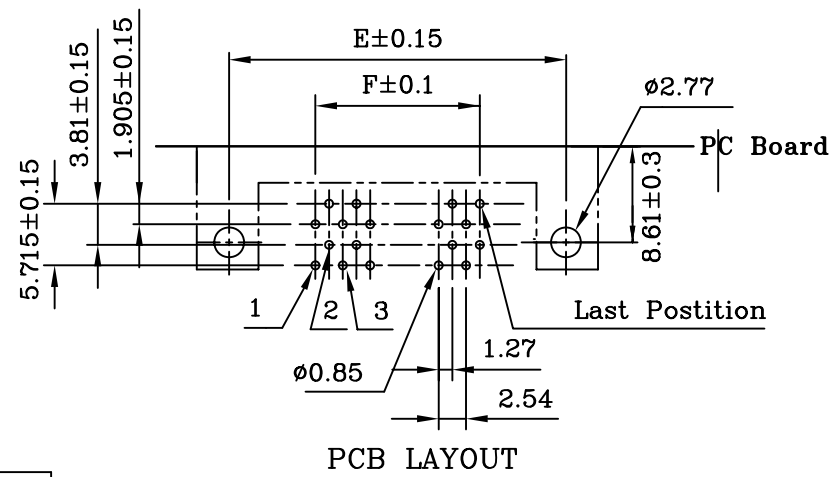

注:
 1. 材質:快鎢銅
 2. 電鍍:鍍鎳
 3. 符合RoHS要求



PART NO. HPC-SRXH-xxx

DWG NO. HPC-SRXH-xxx

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION

TOLERANCES ARE

.X ± 0.2
 .XX ± 0.1
 .XXX ±
 AWG

DESCRIP TION:

**1.27mm (.050") Ribbon Series
 Receptacles Headers Right-Angle
 Mount Type**

AREA

REVISIONS

HK

DATE

煜倫股份有限公司