
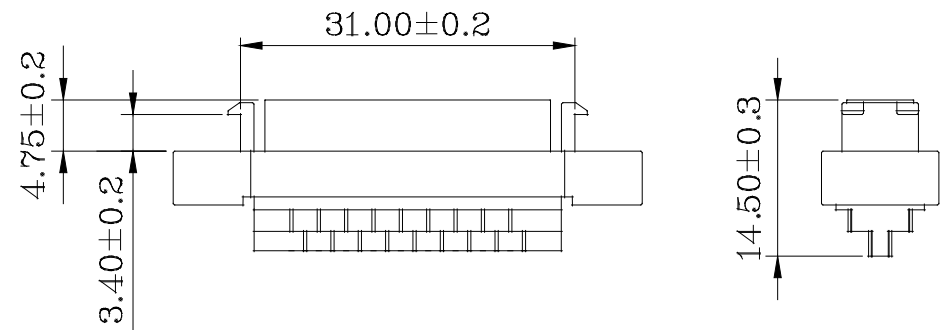


• MATERIALS:(RoHS Compliant)

Housing: Plastic Thermoplastic  
 P.B.T UL94V-0 Black  
 Contacts: Phosphor Bronze Gold  
 Selective Plated  
 Bracket: Zinc Alloy Nickel  
 Plated Over Copper

• ELECTRICAL CHARACTERISTICS:

Contact Current Rating: 1 Amp  
 Dielectric Withstanding Voltage: 500V AC  
 Insulation Resistance: >500MΩ/Min  
 Contact Resistance: 35mΩ/Max  
 Operation Temperature: -55°C ~ +105°C

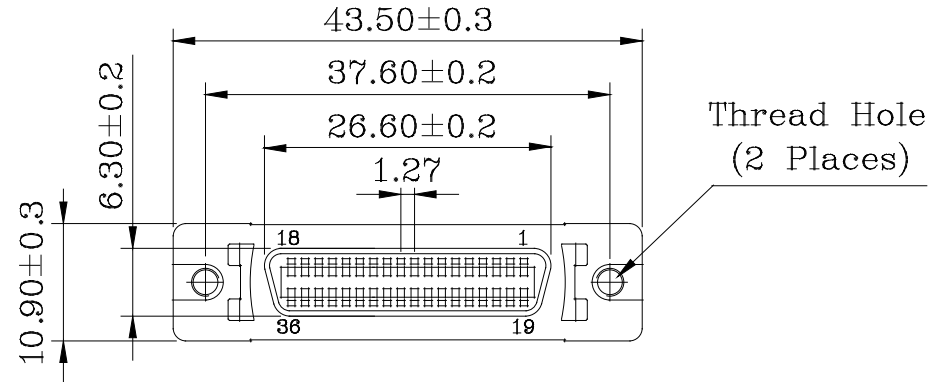

RoHS Compliant

TOLERANCES ARE



煜倫股份有限公司

www.morethanall.com

DRAWING BY CY		X.± .X± .XX± .XXX± ANG±
CHECKED BY GENIUS		
UNIT / mm	SCALE 1 : 1	
DATE		
SIZE A4	PPOJECTION	

ORDER INFORMATION

HPC-SSL-036-LF  
 SERIES | | | LEADFREE  
 | | | 36 WAY  
 | | | LOCK  
 | | | SOLDER  
 | | | FEMALE

DESCRIPTION: 1.27mm(.050") Ribbon 36P Cable Receptacles Connector Solder Type