

• **MATERIALS:(RoHS Compliant)**

Housing: Plastic thermoplastic  
P.B.T UL94V-0 black

Contacts: Phosphor bronze gold  
selective plated

Bracket: Die-Cast zinc nickel  
plated over copper

• **ELECTRICAL CHARACTERISTICS**



Contact Current Rating: 1 Amp

Dielectric Withstanding Voltage: 500V AC

Insulation Resistance: 500MΩ/Min

Contact Resistance: 35mΩ/Max

Operation Temperature: -55°C ~ +105°C

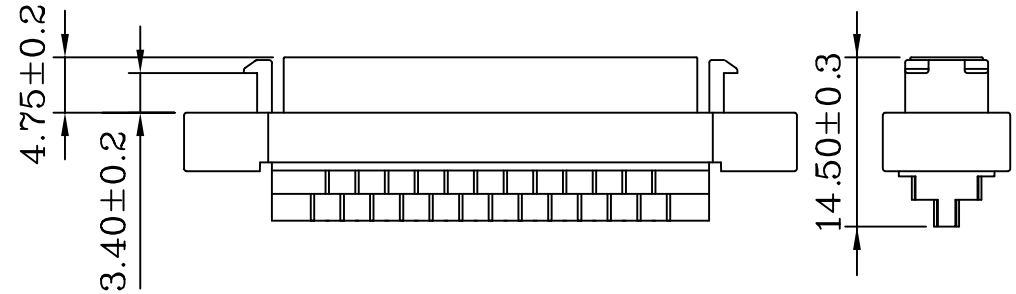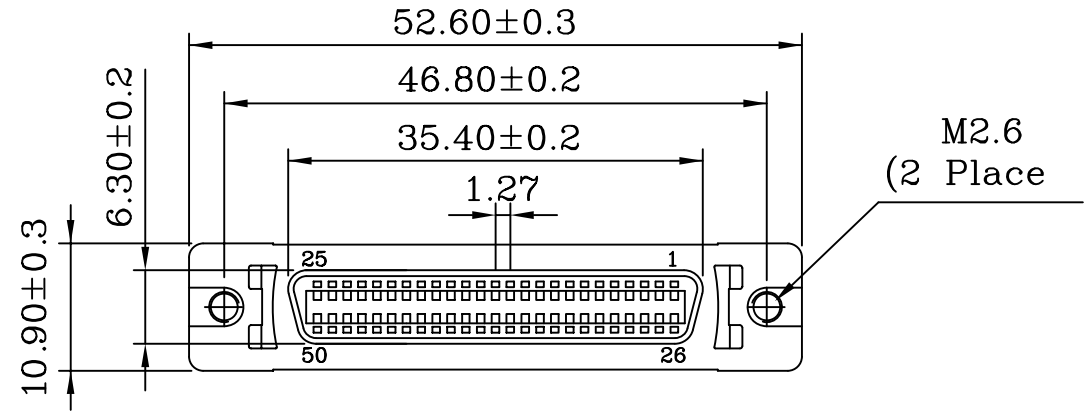

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES  
煜倫股份有限公司

www.morethanall.com

**RoHS Compliant**

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

TOLERANCES ARE

X.±  
.X±  
.XX±  
.XXX±  
ANG±

PJECTION

照片框

**ORDER INFORMATION**

HPC-SSL-050-LF  
SERIES | LEADFREE  
| 50 WAY  
| LOCK  
| SOLDER  
| FEMALE

DESCRIPTION: 1.27mm(.050") Ribbon 50P Cable Receptacles Connector Solder Type