

• **MATERIALS:(RoHS Compliant)**

Housing: Plastic thermoplastic
P.B.T UL94V-0 black

Contacts: Phosphor bronze gold
selective plated

Bracket: Die-Cast zinc nickel
plated over copper

• **ELECTRICAL CHARACTERISTICS**



Contact Current Rating: 1 Amp

Dielectric Withstanding Voltage: 500V AC

Insulation Resistance: 500MΩ/Min

Contact Resistance: 35mΩ/Max

Operation Temperature: -55°C ~ +105°C

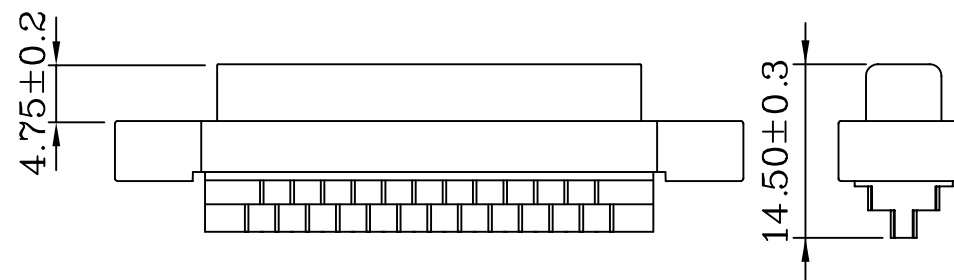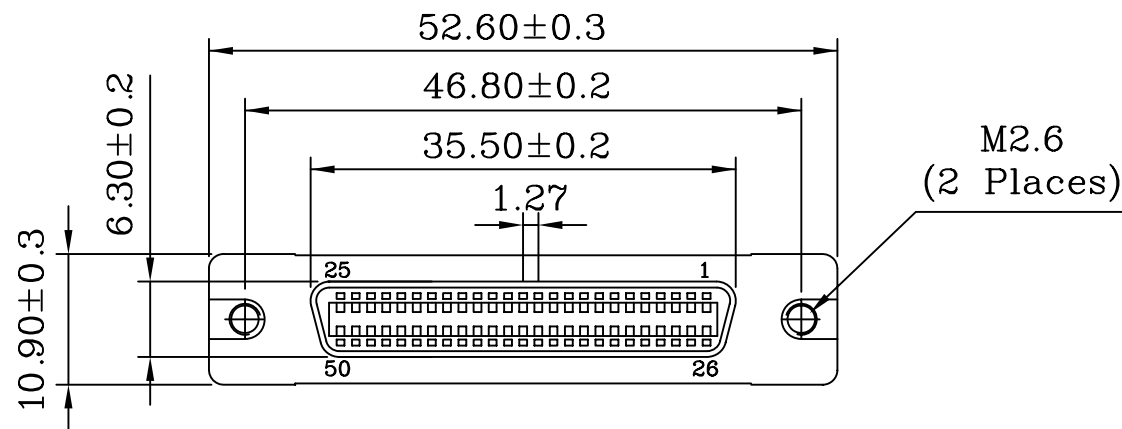

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X.±
.X±
.XX±
.XXX±
ANG±

PJECTION

照片框

ORDER INFORMATION

HPC-SSX-050-LF
SERIES | LEADFREE
50 WAY
NON LOCK
SOLDER
FEMALE

DESCRIPTION: 1.27mm(.050") Ribbon 50P Cable Receptacles Connector Solder Type