

FEATURES:



- Half pitch 1.27mm(.050") series
- Centronic type female connector for P.C.B S.M.T type
- Fully EMI/RFI shielded

MATERIALS:


- Housing: Plastic thermoplastic
Nylon PA-9T UL94V-0 black
- Contact: Phosphor bronze gold selective plated
- Front Shell: Steel Nickel plated over copper

ELECTRICAL:

- Current Rating: 1 Amp
- Insulation Resistance: 500MΩ/Min
- Withstanding Voltage: 500V AC/Min
- Contact Resistance: 35mΩ Max
- Temperature Range: -55°C ~ +85°C

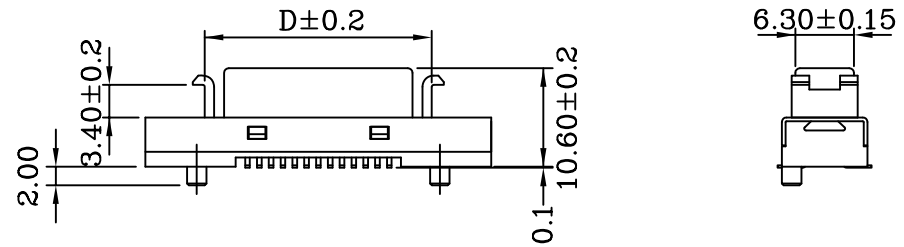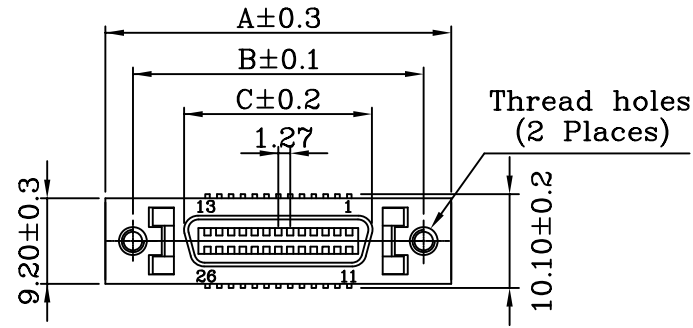

NO. of CONTACTS	A	B	C	D	E	F	G
20	33.38	27.45	16.44	20.83	11.43	22.32	27.45
26	37.19	31.26	20.25	24.64	15.24	26.13	31.26
36	43.54	37.61	26.60	30.99	21.59	32.48	37.61

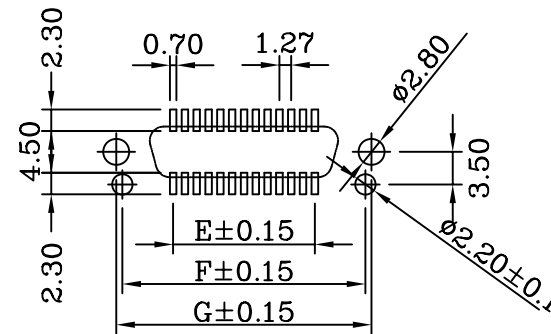

HPC-SVPL-xxx-LF
LEADFREE

RoHS Compliant



PART NO. HPC-SVPL-xxx

DWG NO. HPC-SVPL-xxx

CHECKED BY CY

FILE NO.

DRAWING BY

TOLERANCES ARE

.X ± 0.2
.XX ± 0.1
.XXX ±
AWG

DESCRIPTION:

1.27mm(.050") Pitch Centronic
Female Connector
for S.M.T Type

煜倫股份有限公司

UNIT / mm

SCALE 1:1

PROJECTION



AREA

REVISIONS

HK

DATE