

• **MATERIALS:(RoHS Compliant)**

Housing And Cover : Plastic thermoplastic
Nylon PA-9T UL94V-0 black

Contacts : Phosphor bronze gold
selective plated

Bracket : Die-Cast Zinc NICKEL
plates over copper

Front Shell : Steel nickel plated
over copper

• **ELECTRICAL CHARACTERISTICS**





Contact Current Rating: 0.5 Amp

Dielectric Withstanding Voltage: 150V AC

Insulation Resistance: 500MΩ/Min

Contact Resistance: 40mΩ Max

Operation Temperature: -55°C ~ +85°C

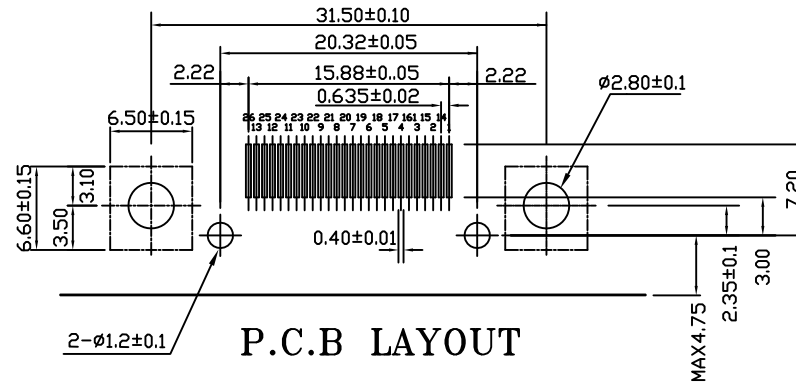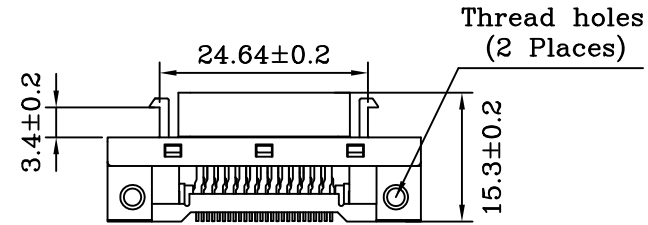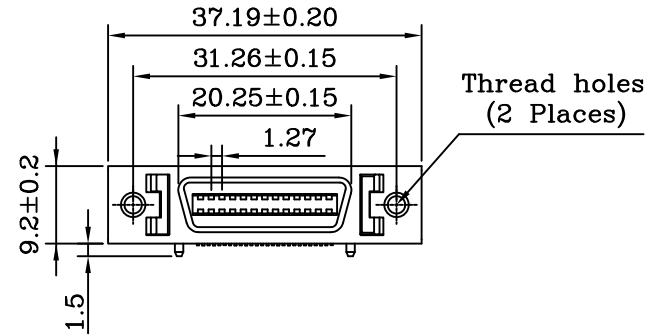

HPC-SWL-026-LF
LEADFREE
RoHS Compliant

MORETHANALL
CONNECTORS
ASSEMBLIES

PART NO. HPC-SWL-026

DWG NO. HPC-SWL-026

FILE NO.


UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X ± 0.2

.XX ±

.XXX ±

AWG

DESCRIPTION:

1.27mm (.050") Ribbon 26P
Receptacles Headers Right-Angle
SMT Type

AREA

REVISIONS

HK

DATE

煜倫股份有限公司