

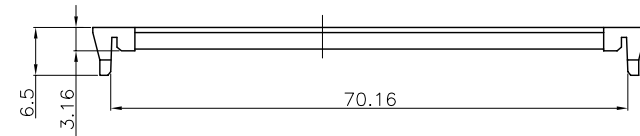
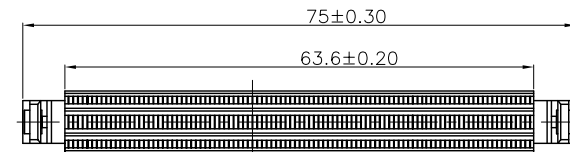


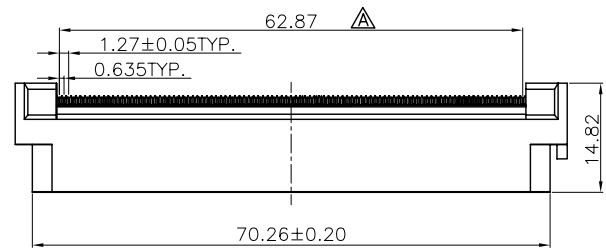


MATERIAL:

- 1.HOUSING: PBT+30%G.F.(UL 94V-0)
- 2.TERMINAL:Bronze,C5191R-H T=0.40±0.01mm
- 3.TETMINAL PLATED:GOLD PLATING 3~50u"ON CONTACT;100u" MIN NICKEL OVERALL.

SPECIFICATION:

- 1.CURRENT RATING:0.5 AMP. MAX.
- 2.DIELECTRIC WITHSTANDING VOLTAGE:500V AC R.M.S. FOR ONE MINUTE.
- 3.INSULATION RESISTANCE:1000M OHMS MIN.
- 4.CONTACT RESISTANCE :30m OHMS MAX.
- 5.OPERATING TEMPERATURE :-20°C TO +85°C.

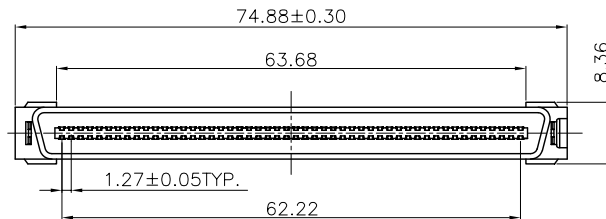

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±  
.X ± 0.20  
.XX ± 0.15  
.XXX ±  
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

HPCP-PF-080-LF

SERIES | LEADFREE  
IDC 80 WAY  
MALE

DESCRIPTION: 80P(M) 刺破式 CUSTOMER