



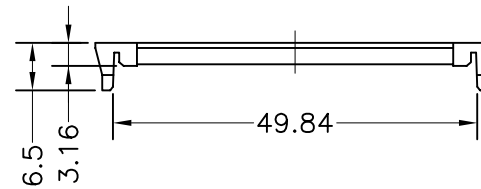
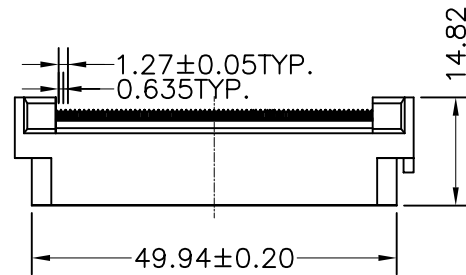
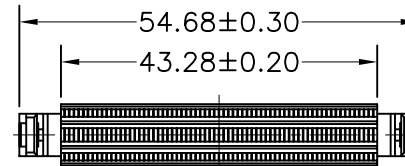


MATERIAL:

- 1.HOUSING: PBT+30 %G.F.(UL 94V-0)
- 2.TERMINAL: Bronze, C5191R-H T=0.40±0.01mm
- 3.TERMINAL PLATED: GOLD FLASH ON CONTACT;
100μ" MIN NICKEL OVERALL.

SPECIFICATION:

- 1.CURRENT RATING: 0.5 AMP. MAX.
- 2.DIELECTRIC WITHSTANDING VOLTAGE: 500V AC
R.M.S. FOR ONE MINUTE.
- 3.INSULATION RESISTANCE: 1000M ΩHMS MIN.
- 4.CONTACT RESISTANCE : 30m ΩHMS MAX.
- 5.OPERATING TEMPERATURE : -20°C TO +85°C.

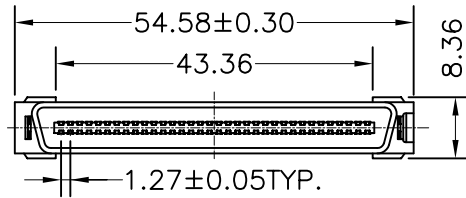

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

P PROJECTION

照片框

ORDER INFORMATION

HPCP-PF2-068-LF

SERIES | | LEADFREE
68 WAY
TWO TYPE
IDC
MALE

DESCRIPTION: (M)68P 刺破式(ASS'Y) CUSTOMER