


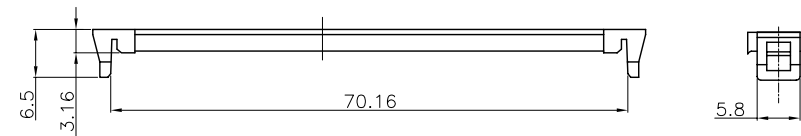
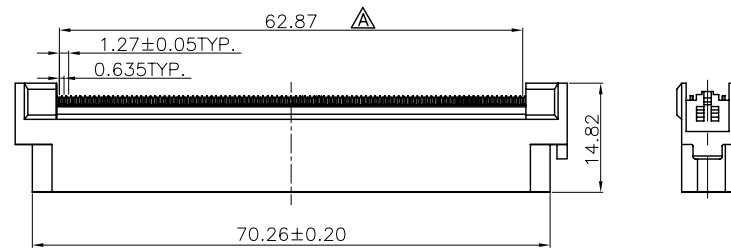
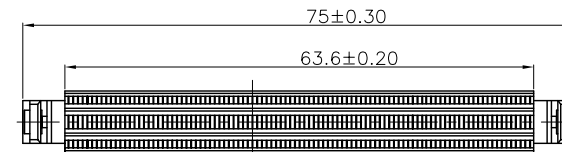


MATERIAL:

- 1.HOUSING: PBT+30%G.F.(UL 94V-0)
- 2.TERMINAL:Bronze,C5191R-H T=0.40±0.01mm
- 3.TETMINAL PLATED:GOLD PLATING 3~50u"ON CONTACT;100u" MIN NICKEL OVERALL.

SPECIFICATION:

- 1.CURRENT RATING:0.5 AMP. MAX.
- 2.DIELECTRIC WITHSTANDING VOLTAGE:500V AC R.M.S. FOR ONE MINUTE.
- 3.INSULATION RESISTANCE:1000M OHMS MIN.
- 4.CONTACT RESISTANCE :30m OHMS MAX.
- 5.OPERATING TEMPERATURE :-20°C TO +85°C.

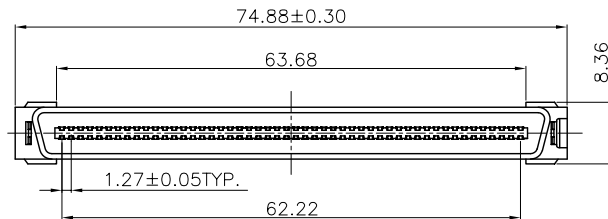

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X, ±

CHECKED BY GENIUS

.X ± 0.20

UNIT / mm

SCALE 1 : 1

.XX ± 0.15

DATE

.XXX ±

ANG ±

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

HPCP-PF2-080-LF

SERIES | | LEADFREE
80 WAY
TWO TYPE
IDC
MALE

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: 80P(M) 刺破式 CUSTOMER