

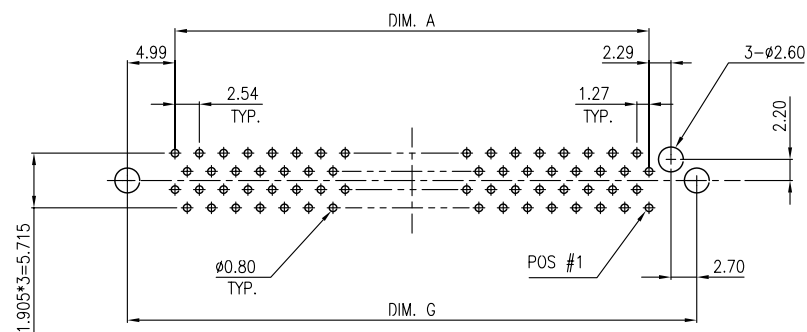
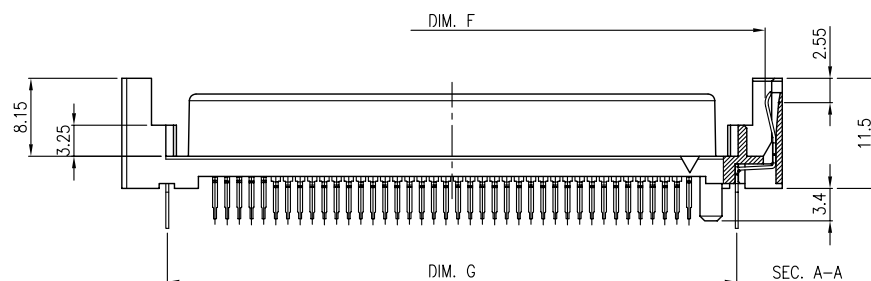


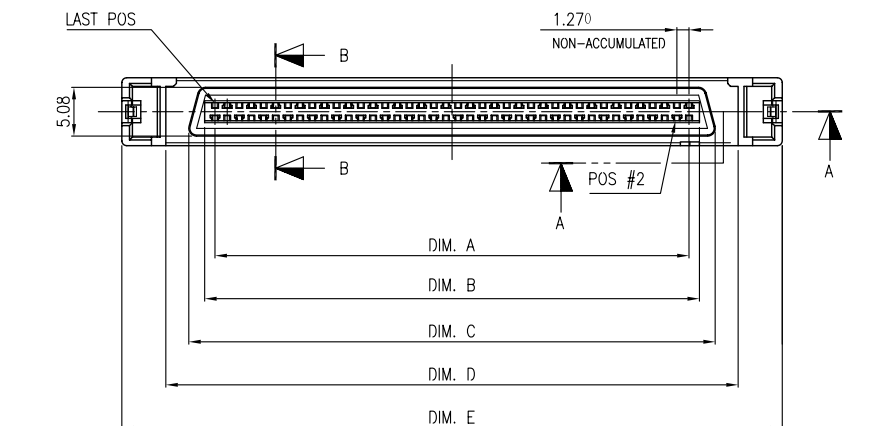

RECOMMENDED P.C. BOARD LAYOUT

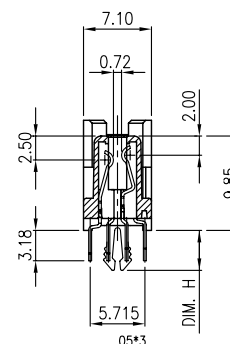

SEC. B-B

NOTES:

1. UNLESS OTHERWISE SPECIFIED, ALL TOLERANCES FOLLOW DRAWING COMMON STANDARD.
2. UNLESS OTHERWISE SPECIFIED, ALL RADII ARE 0.2 MM.
3. MATERIAL :
INSULATOR L.C.P.+30% GLASS REINFORCED UL94V-0 , BLACK
CONTACT PHOSPHOR BRONZE, C5191R-H
THICKNESS= 0.30 MM
METAL CLIP PHOSPHOR BRONZE, C5191R-H
THICKNESS= 0.30 MM
4. CONTACTS FIRST MATE (LONG CONTACT) OF
80-POS 1,36,37,38,39,40,41,42,43,45,46,75,76,77,78,79,80
40-POS 21,22,23,26,29,32,35,36,37,38,39,40
20-POS 11,12,13,14,17,18,19,20
ANOTHER CONTACTS ARE SECOND MATE(SHORT CONTACT).
5. CONNECTOR WILL ACCOMMODATE MATING PRINTED CIRCUIT BOARD OF 2.20mm THICKNESS.

POS.	DIM.	DIM. A	DIM. B	DIM. C	DIM. D	DIM. E	DIM. F	DIM. G
20-POS		11.43	13.6	16.9	21.7	30.9	27.00	21.41
40-POS		24.13	26.3	29.6	34.4	43.6	39.70	34.11
80-POS		49.53	51.7	55.0	59.8	69.0	65.10	59.51

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

HPCP-SDB-xxx-LF

SERIES
LEADFREE
020-080 WAY
B TYPE
DIP 180°
FEMALE

DESCRIPTION: 1.27 BOARD TO BOARD SERIES P.C.B. MOUNTING RECEPTACLE,ASSEMBLY