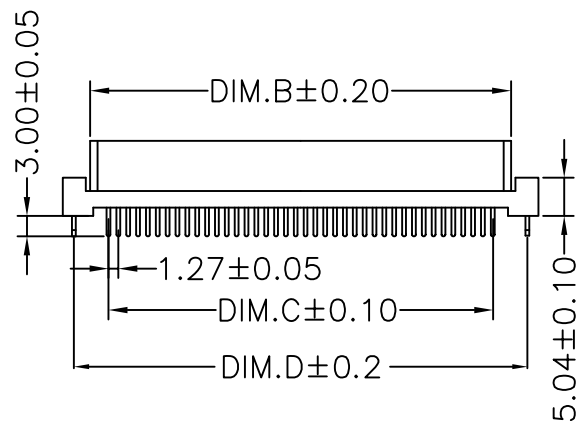
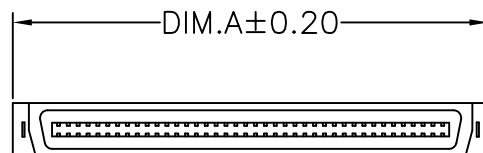


PART NUMBER	PIN	A	B	C	D
HPCP-SDZS15-020	20	24.15	16.93	11.43	21.43
HPCP-SDZS15-040	40	36.85	29.63	24.13	34.13
HPCP-SDZS15-050	50	43.20	35.98	30.48	40.48
HPCP-SDZS15-068	68	54.63	47.41	41.91	51.91
HPCP-SDZS15-080	80	62.25	55.03	49.53	59.53
HPCP-SDZS15-100	100	74.85	67.77	62.23	72.20

FINISH

.CONTACT:15u INCH GOLD PLATING

OTHER

.ROHS REGULATION COMPLY

.Cd & Pb CONTENT FOR BRONZE OR BRASS SHOULD BE LESS THAN THE FOLLOWING VALUE

Cd<75 PPM Pb<40,000 PPM

MATERIAL :

INSULATOR : NYLON 9T

CONTACT : PHOSPHOR BRONZE OR BRASS

CONTACT PLATED : GOLD OR TIN OVER NICKEL

SPECIFICATION :

CURRENT RATING : 1AMP.

WITHSTANDING VOLTAGE : AC 500V R.M.S

INSULATION RESISTANCE : 1000MEGOHMS MINIMUM

AT DC 500V.

CONTACT RESISTANCE : 15 MILLMIOHMS MAXIMUM.

OPERATING TEMPERATURE ; -40°C~105°C.

CONTACT PLATING

CONTACT AREA:GOLD FLASH PLATING OR AS PER REQLEIST

SOLDER TAIL AREA:120u" TIN/PLATING OVER 80u"~120u" NICKEL

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

HPCP-SDZS15-xxx-LF

SERIES
LEADFREE
020~100 WAY
SEMI GOLD 15u"
CLIP
DIP 180°
FEMALE

DESCRIPTION: