
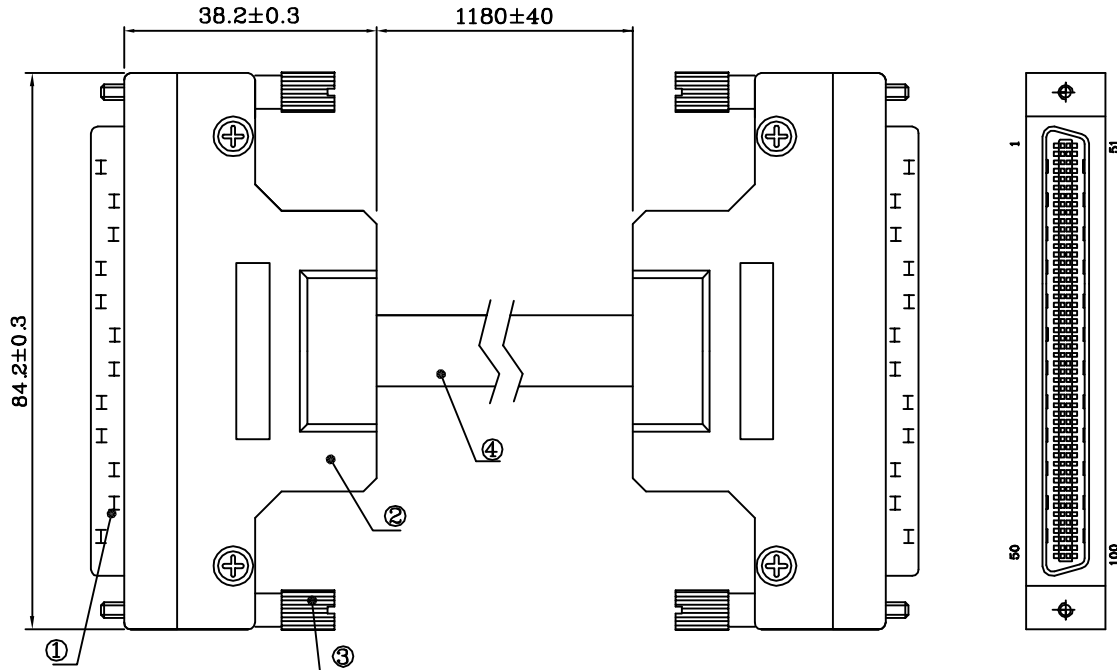
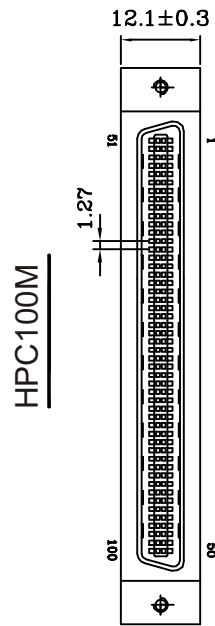


100PIN(M) 100PIN(M)

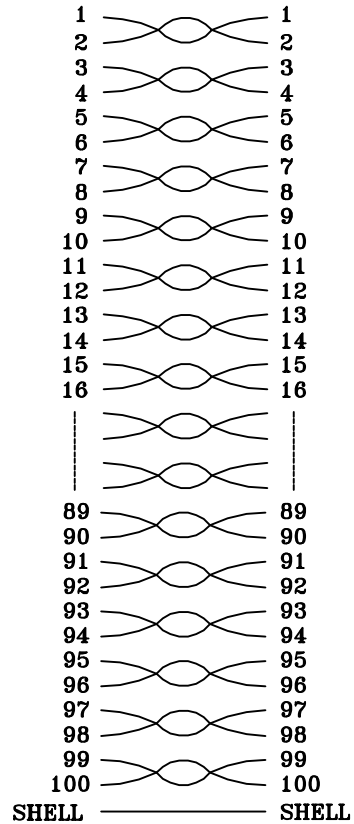

HPC100M

- 100% OPEN / SHORT / INSULATING TEST
- INSULATION TEST: 2MΩ

COMPONENTS	DESCRIPTION	Q'TY
1 HPC100M	Half Pitch 1.27mm 100P Male Connector. Shell: Steel Nickel Plated Insulator: Black P.B.T. Contact: Copper Alloy 5 μ" Gold Plated	2
2 Hood	Zinc Alloy Die-Cast Nickel Plated	2
3 Jackscrews	M2.6 Metal Nickel Plated	4
4 Cable	UL2990 (28AWG*50P) A+E+B Impedances: 90Ω±15Ω OD:10.4mm Color: Black	1

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

PJECTION

照片框

ORDER INFORMATION

HPCX2-10010028M1-M1M18-LF

SERIES

LEADFREE

1180mm

MALE TO MALE

METAL COVER

28 AWG

100 TO 100 WAY

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: SCSI Cable L : 118CM