


**WIRE CONNECTION:**

26M		20F	
1	_____	1	_____
2	_____	2	_____
3	_____	3	_____
4	_____	4	_____
5	_____	5	_____
6	_____	6	_____
7	_____	7	_____
8	_____	8	_____
9	_____	9	_____
10	_____	10	_____
11	_____ NC		
12	_____ NC		
13	_____ NC		
14	_____	11	_____
15	_____	12	_____
16	_____	13	_____
17	_____	14	_____
18	_____	15	_____
19	_____	16	_____
20	_____	17	_____
21	_____	18	_____
22	_____	19	_____
23	_____	20	_____
24	_____ NC		
25	_____ NC		
26	_____ NC		

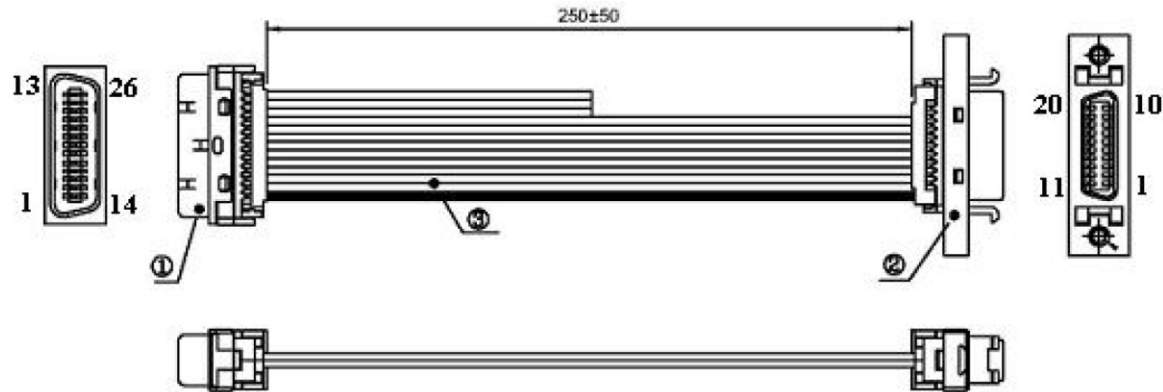

COMPONENTS	DESCRIPTION	Q'TY
1 connector	Half Pitch Ribbon 1.27mm 26P Male Connector Shell: Steel Nickel Plated Insulator: Black P.B.T Contact: Copper Alloy 5u" Gold Plated	1
2 connector	Half Pitch Ribbon 1.27mm 20P Female Connector Shell: Steel Nickel Plated Insulator: Black P.B.T Contact: Copper Alloy 5u" Gold Plated	1
3 Cable	UL2651 28AWG (1.27mm) Color: Gray	2

RoHS Compliant



PART NO. HPCX2-202628F1-A25C

DWG NO. HPCX2-202628F1-A25C

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION

TOLERANCES ARE

- X.±
- .X±
- .XX±
- .XXX±
- ANG

DESCRIPTION:			
	AREA	REVISIONS	DATE

煜倫股份有限公司